

4000 Series

Two-Piece Metal Raceway

INSTALLATION INSTRUCTIONS

Installation Instruction No.: 41403R2 – Updated July 2004

Wiremold Electrical Systems conform to and should be installed and properly grounded in compliance with requirements of the current National Electrical Code, Canadian Electrical Code or codes administered by local authorities.


All electrical products may represent possible shock or fire hazard if improperly installed or used. Wiremold electrical products are UL Listed to U.S. and Canadian safety standards, made for interior use only, and should be installed in conformance with current local and/or the National Electrical Code.

4000 RACEWAY WIRE FILL CAPACITIES FOR DATA/COMMUNICATIONS														
TYPE	UNSHIELDED TWISTED PAIR 24 AWG, 4-PAIR		TELEPHONE 24 AWG, NO. OF PAIRS				COAXIAL				TWINAXIAL	SHIELDED TWISTED PAIR		
	CAT. 5	CAT. 3	2	3	4	25	R658/U	R659/U	R662/U	R66/U	100 OHM	TYPE 1	TYPE 2	TYPE 3
O.D. inches	0.220	0.190	0.140	0.150	0.190	0.410	0.195	0.242	0.242	0.270	0.330	0.390	0.465	0.245
O.D. (mm)	[5.6]	[4.8]	[3.6]	[3.8]	[4.8]	[10.4]	[5.0]	[6.1]	[6.1]	[6.9]	[8.4]	[9.9]	[11.8]	[6.2]
40% fill, divided	37	50	92	80	50	10	47	30	30	24	16	11	8	29
40% fill, undivided	75	100	183	161	100	21	95	62	62	49	33	23	16	60


4000 RACEWAY WIRE FILL CAPACITY FOR POWER											
WIRE SIZE THHN/THWN	O.D. inches [mm]		NUMBER OF CONDUCTORS (40% FILL)								
			WITHOUT DEVICES		WITH DUPLEX / RECT. DEVICES 1.59 in² [1025mm²]		WITH SURGE / GFCI DEVICES 2.30 in² [1485mm²]		LARGE SINGLE RECEPTACLES 3.00 in² [1935mm²]		
			UNDIVIDED	DIVIDED	UNDIVIDED	DIVIDED	UNDIVIDED	DIVIDED	UNDIVIDED	DIVIDED	
14 AWG	0.111	[2.8]	296	127	165	78	107	49	49	20	
12 AWG	0.130	[3.3]	216	93	120	57	78	36	36	15	
10 AWG	0.164	[4.2]	136	58	76	36	49	22	22	9	
8 AWG	0.216	[5.5]	78	33	43	20	28	13	13	5	
6 AWG	0.254	[6.5]	56	24	31	15	20	9	9	3	
4 AWG	0.324	[8.2]	34	15	—	—	—	—	—	—	
3 AWG	0.352	[8.9]	29	12	—	—	—	—	—	—	
2 AWG	0.384	[9.8]	24	10	—	—	—	—	—	—	

- Use No. 8 (5/16", 7.9mm head size) flat head fastener or equivalent to mount base to surface.
 - Utiliser une attache à tête plate de calibre 8 (tête de 7.9mm, 5/16" po.) ou une fixation équivalente pour assujettir le tube guide-fils et les raccords à la surface de montage.
 - Use un sujetador de cabeza plana No. 8 (tamaño de cabeza: 7.9mm, 5/16" de pulgada) o su equivalente para unir la canalita y los accesorios a la superficie de montaje.
- Grounding: Use ground location when provided or install a suitable ground lug, ring terminal or locknut and ground bushing.
 - Mise à la terre: Utiliser l'emplacement de terre prévu ou poser le matériel qui convient: patte de mise à la terre, cosse circulaire à oeil ou écrou de blocage et manchon de terre.
 - Conexión a tierra: Use un localizador de tierra cuando se proporcione o instale una orejeta de tierra, anillo terminal o contratuercas y cojinetes de tierra apropiados.


640B




640C




4000B-10




4001DA



4001DA




4000C




Precut Covers

4000C075 = 12" [30.5cm]	4000C135 = 18" [45.7cm]
4000C195 = 24" [60.9cm]	4000C315 = 36" [91.4cm]


4000WC




4010B




4010D

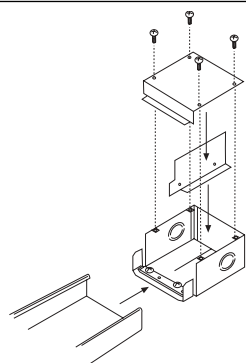


4011

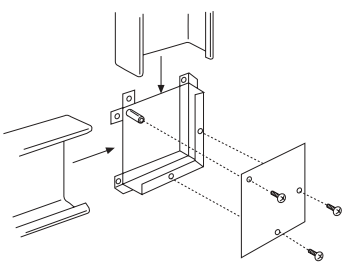


4014A




4015





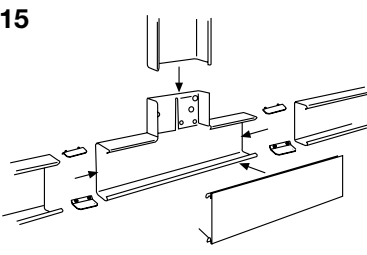


4015D




4018



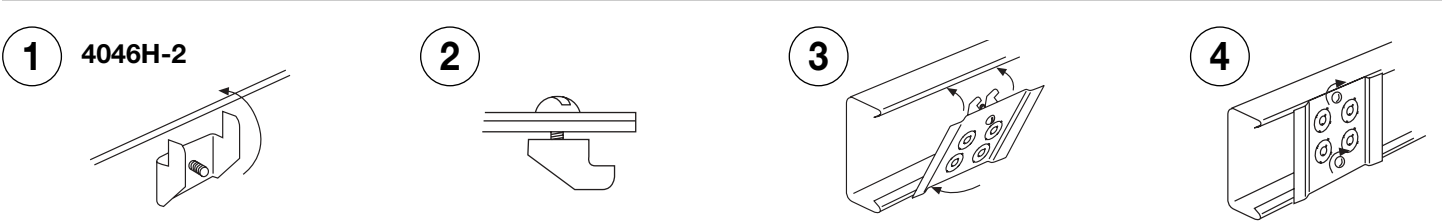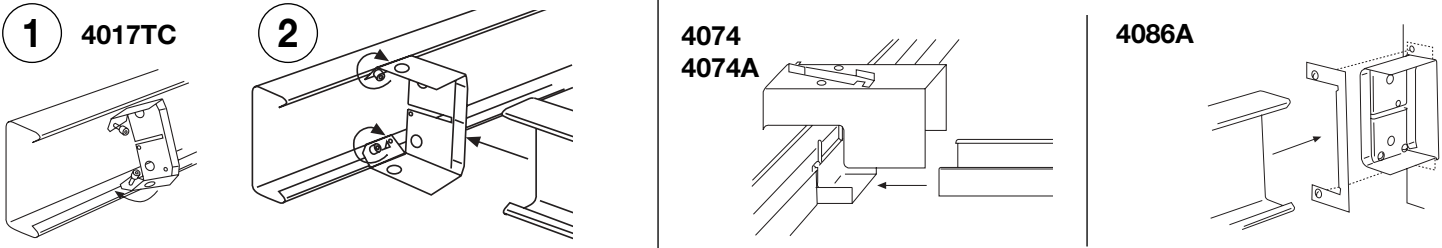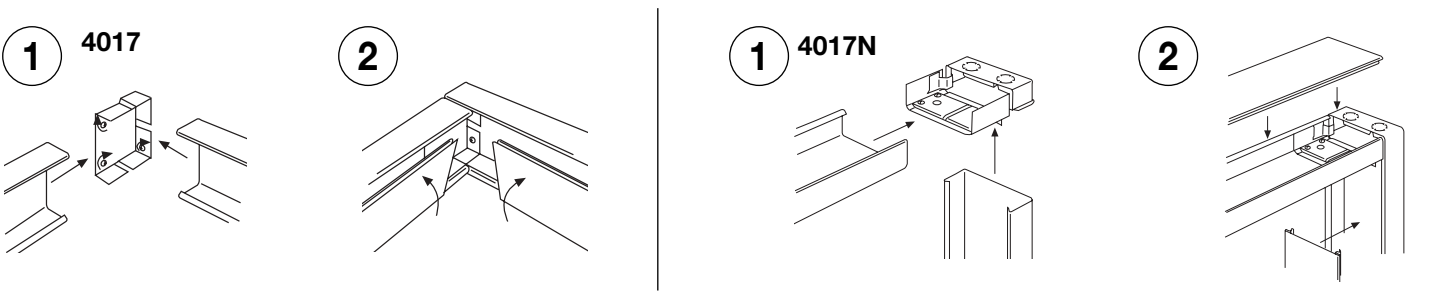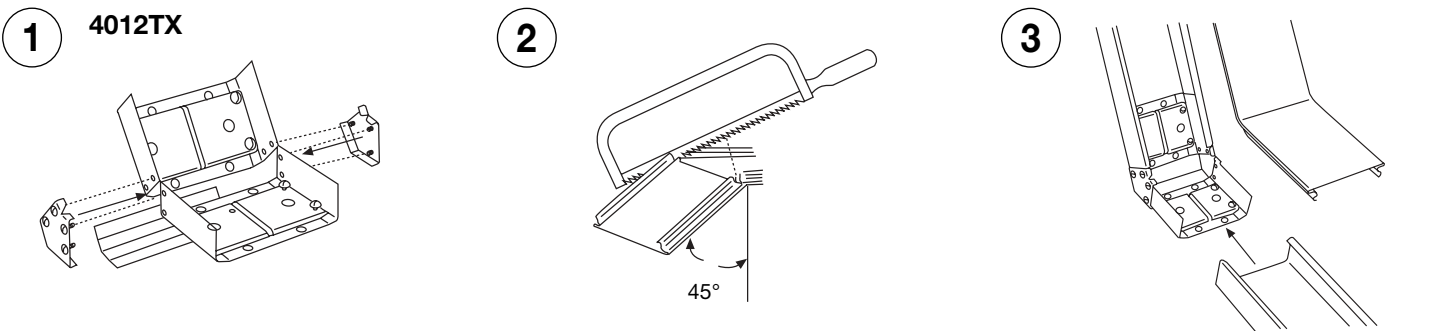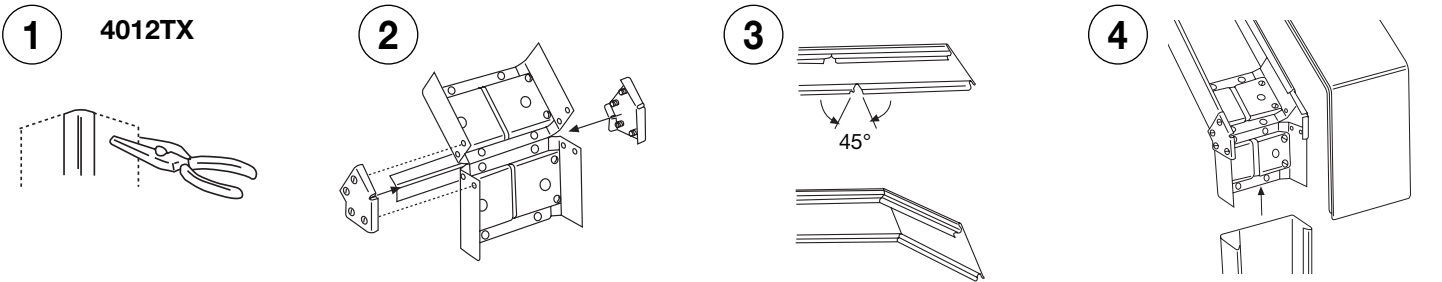

4010DFO FiberReady™ Entrance End Fitting

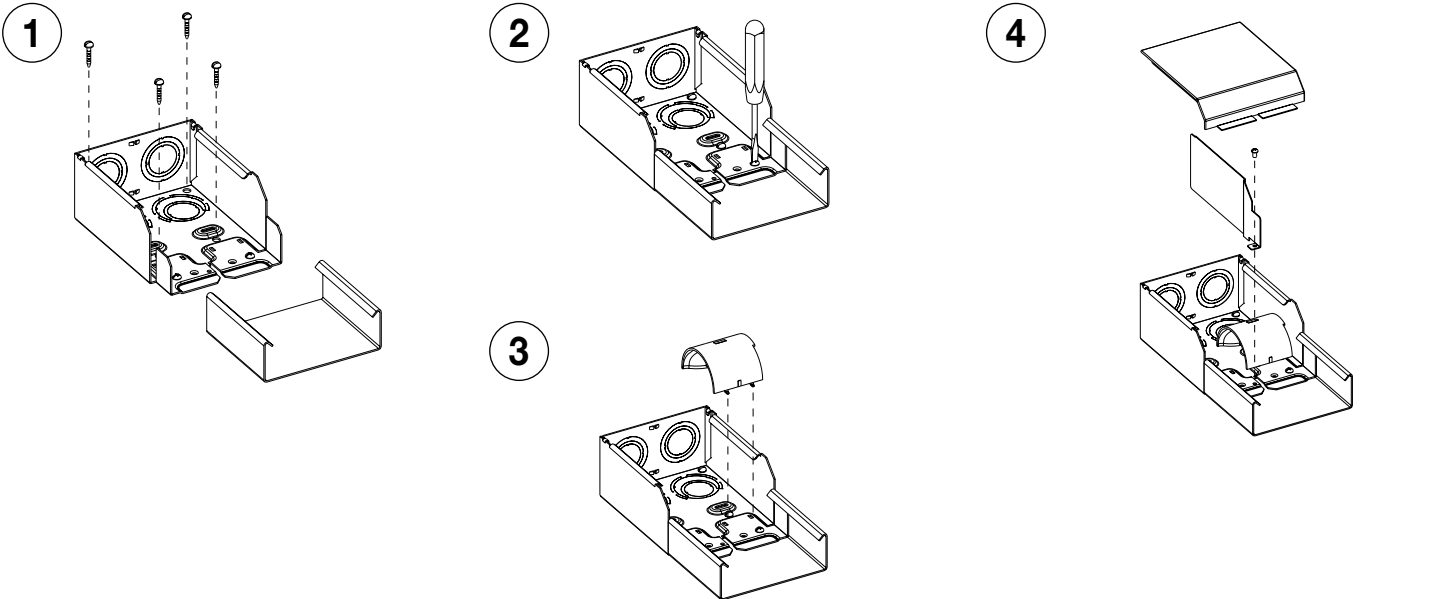

The Wiremold Company
 U.S. and International:
 60 Woodlawn Street • West Hartford, CT 06110
 1-800-621-0049 • FAX 860-232-2062 • Outside U.S.: 860-233-6251
 Canada:
 850 Gartshore Street • Fergus, Ontario N1M 2W8
 1-800-741-7957 • FAX 519-843-5980

