



Low Profile Rack Mounted Shelf Solid Shelf

- Use to center mount networking or other equipment.
- Designed to work with the following mounting spaces:
universal [$\frac{5}{8}$ ", $\frac{5}{8}$ ", $\frac{1}{2}$ " (16mm, 16mm, 13mm)] spacing,
wide [$\frac{1}{4}$ ", $\frac{1}{2}$ " (32mm, 13mm)] spacing or $\frac{1}{2}$ " (25mm) spacing.
- Two (2) mounting spaces required.
- 50 Lb. (.23kg) load capacity.
- Includes: #12-24 mounting hardware.
- UL 1863 Listed (File No. E171936) as a communications circuit accessory.
- Material: 0.090 thick 5052-H32 aluminum sheet or 14 Gauge ASTM 569 Steel
- Finish ____: Aluminum - Brushed (AL)
Aluminum & Steel - Telco Gray Powder Coat (TG),
Flat Black Powder Coat (FB) or Silver Powder Coat (SL)
Other finishes are available upon request.
- Ordering: Specify part number and finish abbreviation.

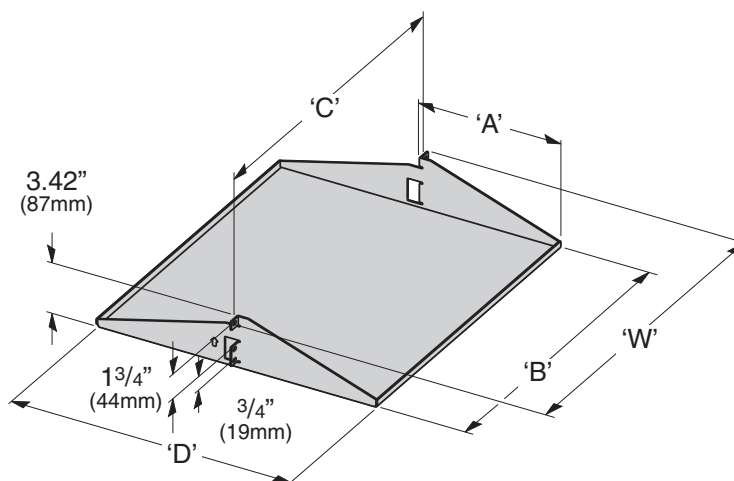



Part Number	Mat'l.	Rack Width 'W'		'A'		'B'		'C'		'D'		Weight	
		In.	(mm)	In.	(mm)	In.	(mm)	In.	(mm)	(mm)	Lbs.	(kg)	
SB745S1916A	Alum	19"	(482)	8"	(203)	17 $\frac{1}{4}$ "	(438)	18 $\frac{5}{16}$ "	(465)	16"	(406)	3.5	(1.6)
SB745S1916S	Steel	19"	(482)	8"	(203)	17 $\frac{1}{4}$ "	(438)	18 $\frac{5}{16}$ "	(465)	16"	(406)	10.1	(4.6)
SB745S1919A	Alum	19"	(482)	9 $\frac{1}{2}$ "	(241)	17 $\frac{1}{4}$ "	(438)	18 $\frac{5}{16}$ "	(465)	19"	(482)	4.1	(1.8)
SB745S1919S	Steel	19"	(482)	9 $\frac{1}{2}$ "	(241)	17 $\frac{1}{4}$ "	(438)	18 $\frac{5}{16}$ "	(465)	19"	(482)	11.8	(5.3)
SB745S2316A	Alum	23"	(584)	8"	(203)	21 $\frac{1}{4}$ "	(540)	22 $\frac{5}{16}$ "	(567)	16"	(406)	4.1	(1.8)
SB745S2316S	Steel	23"	(584)	8"	(203)	21 $\frac{1}{4}$ "	(540)	22 $\frac{5}{16}$ "	(567)	16"	(406)	11.8	(5.3)
SB745S2319A	Alum	23"	(584)	9 $\frac{1}{2}$ "	(241)	21 $\frac{1}{4}$ "	(540)	22 $\frac{5}{16}$ "	(567)	19"	(482)	4.9	(2.2)
SB745S2319S	Steel	23"	(584)	9 $\frac{1}{2}$ "	(241)	21 $\frac{1}{4}$ "	(540)	22 $\frac{5}{16}$ "	(567)	19"	(482)	14.2	(6.4)

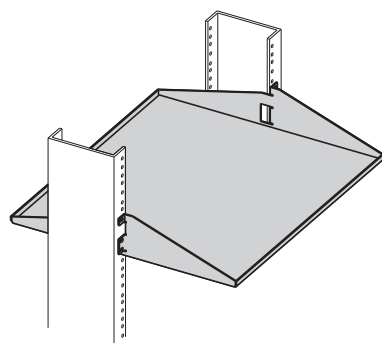

FB is a popular Bee List item

Low Profile Rack Mounted Shelf Ventilated Shelf

- Use to center mount networking or other equipment.
- Designed to work with the following mounting spaces:
universal [5/8", 5/8", 1/2" (16mm, 16mm, 13mm)] spacing,
wide [1 1/4", 1/2" (32mm, 13mm)] spacing or 1/2" (25mm) spacing.
- Two (2) mounting spaces required.
- 50 Lb. (.23kg) load capacity.
- Includes: #12-24 mounting hardware.
- Material: 0.090 thick 5052-H32 aluminum sheet or 14 Gauge ASTM 569 Steel
- Finish ____: Aluminum - Brushed (AL)
Aluminum & Steel - Telco Gray Powder Coat (TG),
Flat Black Powder Coat (FB) or Silver Powder Coat (SL)
Other finishes are available upon request.
- Ordering: Specify part number and finish abbreviation.

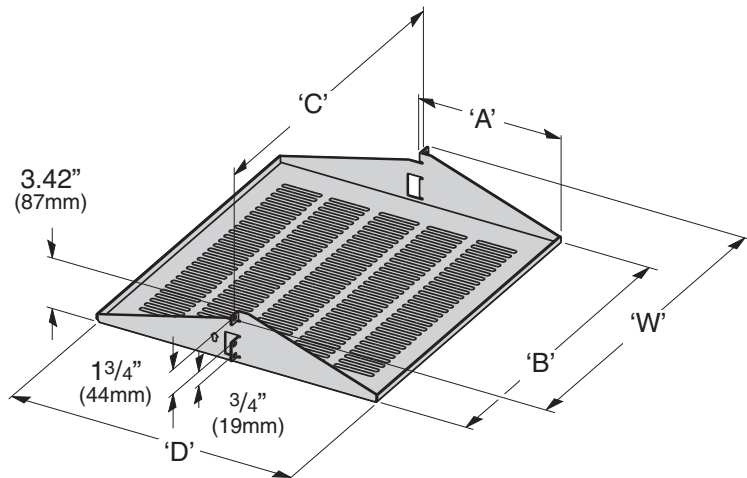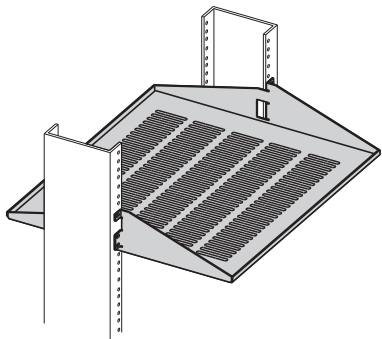

Part Number	Mat'l.	Rack Width 'W'		'A'		'B'		'C'		'D'		Weight	
		In.	(mm)	In.	(mm)	In.	(mm)	In.	(mm)	In.	(mm)	Lbs.	(kg)
SB745V1916A__	Alum	19"	(482)	8"	(203)	17 1/4"	(438)	18 5/16"	(465)	16"	(406)	3.0	(1.3)
SB745V1916S__	Steel	19"	(482)	8"	(203)	17 1/4"	(438)	18 5/16"	(465)	16"	(406)	8.7	(3.9)
SB745V1919A__	Alum	19"	(482)	9 1/2"	(241)	17 1/4"	(438)	18 5/16"	(465)	19"	(482)	3.7	(1.7)
SB745V1919S__	Steel	19"	(482)	9 1/2"	(241)	17 1/4"	(438)	18 5/16"	(465)	19"	(482)	10.7	(4.8)
SB745V2316A__	Alum	23"	(584)	8"	(203)	21 1/4"	(540)	22 5/16"	(567)	16"	(406)	3.7	(1.7)
SB745V2316S__	Steel	23"	(584)	8"	(203)	21 1/4"	(540)	22 5/16"	(567)	16"	(406)	10.7	(4.8)
SB745V2319A__	Alum	23"	(584)	9 1/2"	(241)	21 1/4"	(540)	22 5/16"	(567)	19"	(482)	4.9	(2.2)
SB745V2319S__	Steel	23"	(584)	9 1/2"	(241)	21 1/4"	(540)	22 5/16"	(567)	19"	(482)	14.2	(6.4)



FB are popular Bee List items