



MC® 5 MODULAR CORDS

Siemon uses the highest quality components combined with stringent manufacturing processes to produce the best performing, most durable modular patch cords available. The end result is a cord that exceeds all TIA/EIA and ISO/IEC component specifications for transmission performance.

Additionally, Siemon transmission tests cords prior to shipment, ensuring that Siemon customers never receive a non-compliant cord.

Choose Siemon MC modular cords for a perfectly matched, end-to-end channel solution with unparalleled performance.

Siemon modular plugs exceed FCC CFR 47 part 68 subpart F and IEC 60603-7 specifications and have 50 microns minimum of gold plating over nickel. The result is superior transmission performance and long-term resistance to corrosion from humidity, extreme temperatures, and airborne contaminants

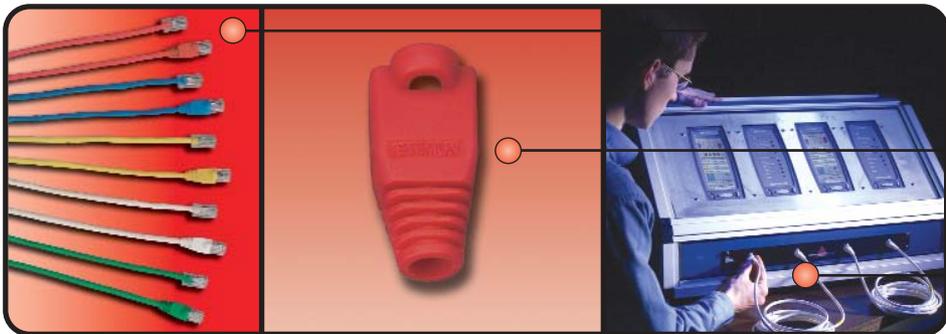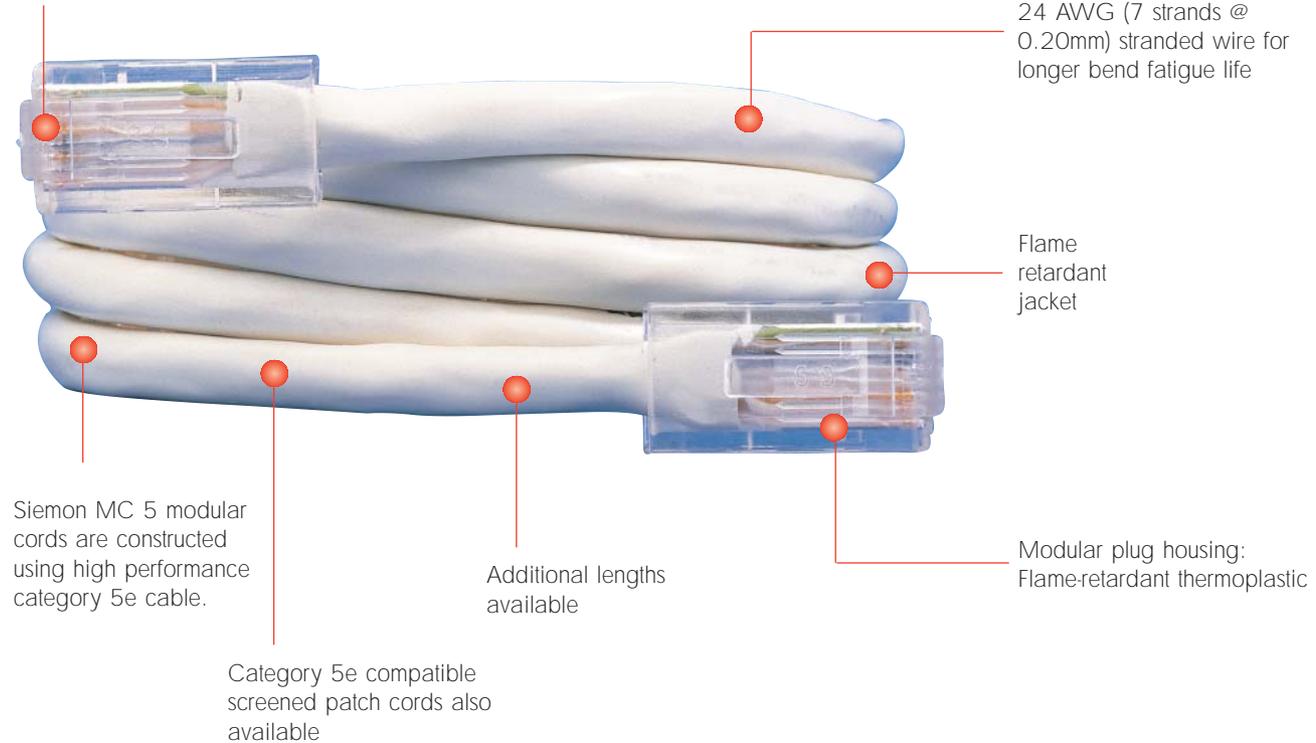

Technical Tip!
Factory terminated and tested modular cords are required to achieve consistent category 5e compatibility. Field termination is not recommended

PATCH CORDS, PLUGS & CABLE



Category 5e Stranded Cable Specifications:

All MC[®] 5 assemblies are manufactured using cable that meets ANSI/TIA/EIA-568-B.2 requirements for category 5e stranded Cable.

MC 5 Modular Cords:

- MC5-8T-(XX)-B(XX)C.....Double-ended, 4-pair modular stranded cord, T568A/T568B wiring, color matching jacket/boot
- MC5-8-T-(XX)-(XX).....Double-ended, 4-pair modular stranded cord, T568A/T568B wiring, colored jacket, no boot
- MC-BOOT-(XX)-100Colored Boots (pack of 100)

Use 1st (XX) to specify cord length:

03 = 0.91m (3 ft.), 05 = 1.52m (5 ft.), 07 = 2.13m (7 ft.),
10 = 3.05m (10 ft.), 15 = 4.57m (15 ft.), 20 = 6.10m (20 ft.)

Use 2nd (XX) to specify jacket/boot color:

01 = black, 02 = white, 03 = red, 04 = gray, 05 = yellow,
06 = blue, 07 = green

Ⓢ Add "B" for bulk project pack of 100 modular cords

Custom lengths are available upon request. Contact our Customer Service Department for more information

Note: MAX[®] 6, CT[®] 6, and HD[®] 6 products are backward compatible with our MC 5 modular cords.

Solid IC5 Single-End Modular Cords:

- IC5-8T-(XX).....IC5, single-ended, 4-pair solid cable assembly, T568A, gray jacket, CMR, no boot
- IC5-8A-(XX).....IC5, single-ended, 4-pair solid cable assembly, T568B, gray jacket, CMR, no boot
- IC5-8T-(XX)-B(XX).....IC5, single-ended, 4-pair solid cable assembly, T568A, blue jacket, CMP, with colored boot
- IC5-8A-(XX)-B(XX).....IC5, single-ended, 4-pair solid cable assembly, T568B, blue jacket, CMP with colored boot


Use 1st (XX) to specify cord length:

10 = 3.05m (10 ft.), 20 = 6.10m (20 ft.), 30 = 9.1m (30 ft.),
40 = 12.2m (40 ft.), 50 = 15.2m (50 ft.), 60 = 18.3m (60 ft.)

Use 2nd (XX) to specify boot color: 02 = white, 06 = blue

Custom lengths are available upon request. Contact our Customer Service Department for more information

Frequency (MHz)	Maximum INSERTION LOSS (dB/100 m)	Power Sum NEXT Loss (dB)
1 MHz	2.4	62.3
4 MHz	4.9	53.3
10 MHz	7.8	47.3
16 MHz	9.9	44.3
20 MHz	11.1	42.8
31.25 MHz	14.1	39.9
62.5 MHz	20.4	35.4
100 MHz	26.4	32.3

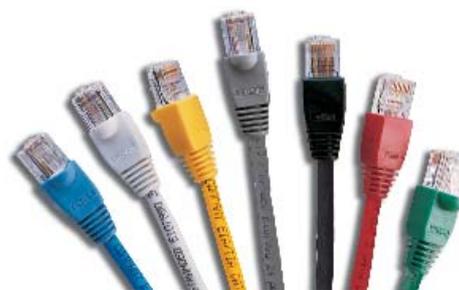

Because we are continuously improving our products, The Siemon Company reserves the right to change specifications and availability without prior notice. CT[®], HD[®], MAX[®] and MC[®] are trademarks of The Siemon Company

The Americas
Watertown, CT USA
Phone (1) 860 945 4200

Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1483 480040

Asia/Pacific
Shanghai, P.R. China
Phone (86) 21 6390 6778