


Part Number.....7215-S

Made in the USA..... Yes
 Mounting..... Vertical
 AC Rating Volts..... 125
 AC Rating Amps..... 15
 AC Rating Watts..... 1800
 AC Rating Frequency-Hz..... 50/60 HZ
 Circuit Breaker..... 15A
 Pilot Light..... None
 On/Off Switch..... None
 Over Current Protection..... CB
 Power Cable AWG..... 14/3 SJT
 Power Cable Length..... 15'
 Plug Type..... NEMA 5-15P
 Receptacle Type..... NEMA 5-15R
 Receptacle Style..... Single
 Receptacle Quantity..... 16
 Max. Output per Powerstrip..... 15 Amp
 Joule Rating..... 420
 UL Rating..... Complies w/UL1449
 & UL60950-1
 Clamping Level..... <330V
 Response Time..... <5 nanoseconds
 Max. Surge Current..... 13,000 Amp
 EMI/RFI Noise Reduction..... 40db
 Surge Indicator Red LED..... Yes
 Connected Equipment Warranty..... N/A
 Product Warranty-GLCC..... 1 year
 Certification/Agency Approvals..... UL & CSA Approved
 Unit Weight lbs..... 6

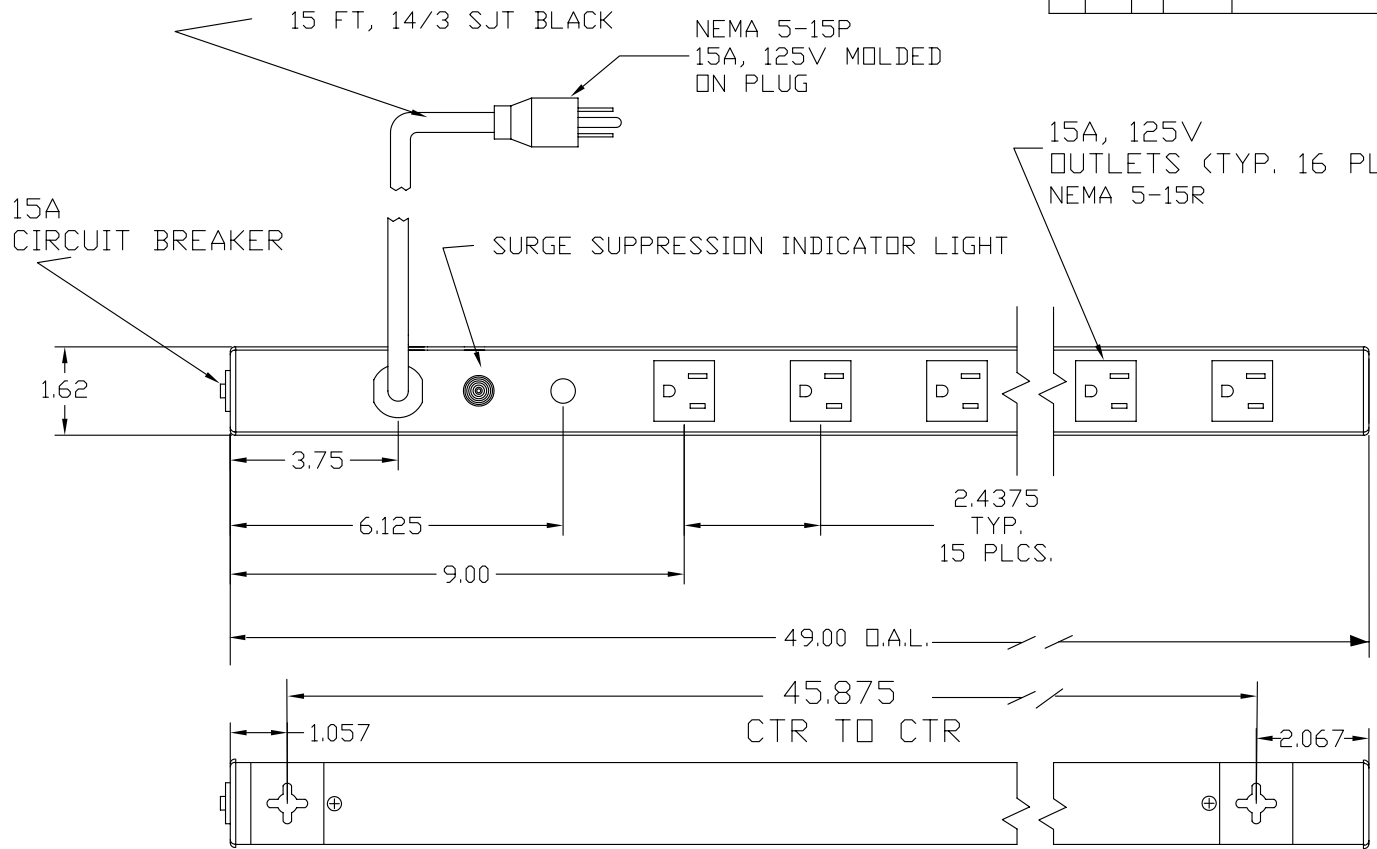

330V UL1449 CLAMPING LEVEL
 13,000 AMP MAXIMUM SURGE CURRENT
 40db EMI/RFI NOISE REDUCTION
 420 JOULES
 TRIGGER RESPONSE TIME: <5 NANoseconds

NOTE: UL & CSA APPROVED

Rev.	Date	Dr.	CKD/APVD.	Description

TOLERANCES UNLESS OTHERWISE SPECIFIED		Dr. T. KAUPP	Date: 06-14-99	Title 7215S GREAT LAKES
DECIMALS	0.0 = ± 0.100			
	0.00 = ± 0.020			
	0.000 = ± 0.005			
	ANGLES = ± 1°			
SCALE: N/A		SHT 1 of 1		
Great Lakes case & cabinet co., inc.				DWG No. 7215S.dwg
				Rev. -