

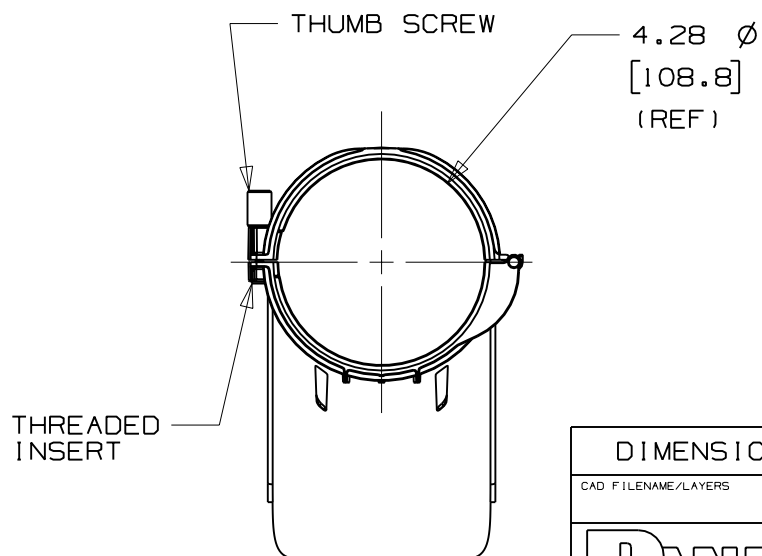
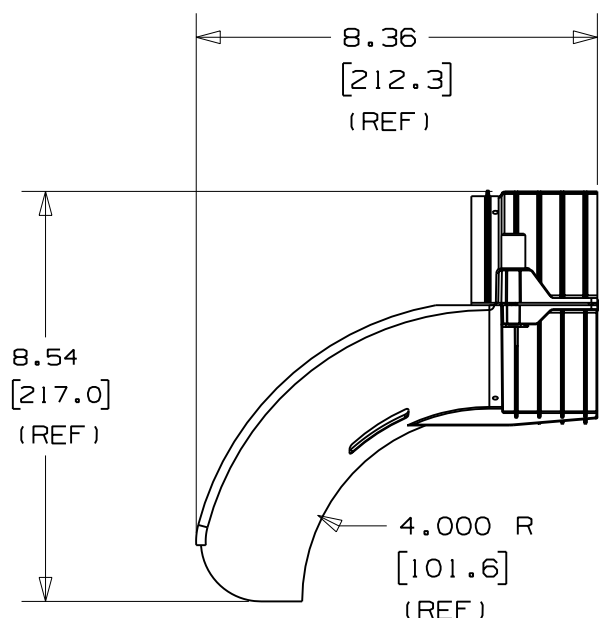


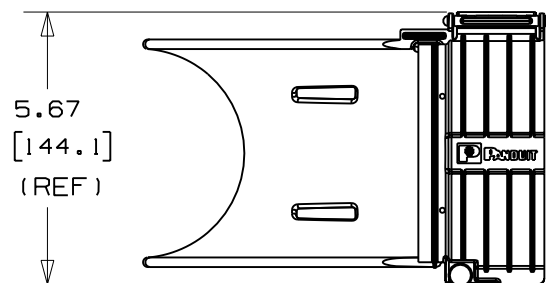

PANDUIT PART NO.	WEIGHT lbs l (g) pc
CWF400	0.53 (240)

NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
2. SPILLWAY MATERIAL: FR GLASS FILLED NYLON 6/6
THUMB SCREW MATERIAL: BRASS
THREADED INSERT MATERIAL: ALUMINUM
3. PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 4" (101.6) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 30 lbs (13.6kg).
4. PRODUCT IS DESIGNED FOR 4" EMT TUBING.

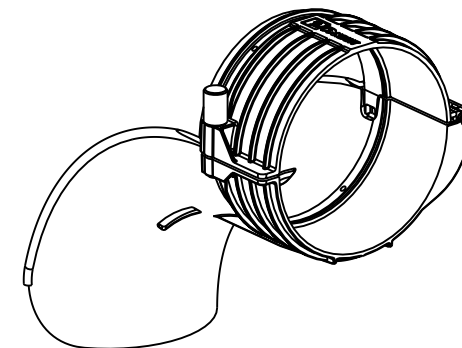

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS

G03203CA_PB_CWF400_00

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

CONDUIT WATERFALL - - 4" EMT COMPATIBLE
(CWF400)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)
(.XX) ±0.02 (0.5) ANGLES ±5°

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE
PROJECTION.

DRAWN BY

JAD

MAT'L:

DATE

1/9/07

SEE NOTE 1

CHK'D

SCALE

1/4

DRAWING NO.

GB3203CA

DWG

SIZE

A

R	1/9/07	JAD		INITIAL RELEASE	GB3203CA	R			
REV	DATE	BY	CHK	DESCRIPTION	ECN	- R	CUST	SUP	