

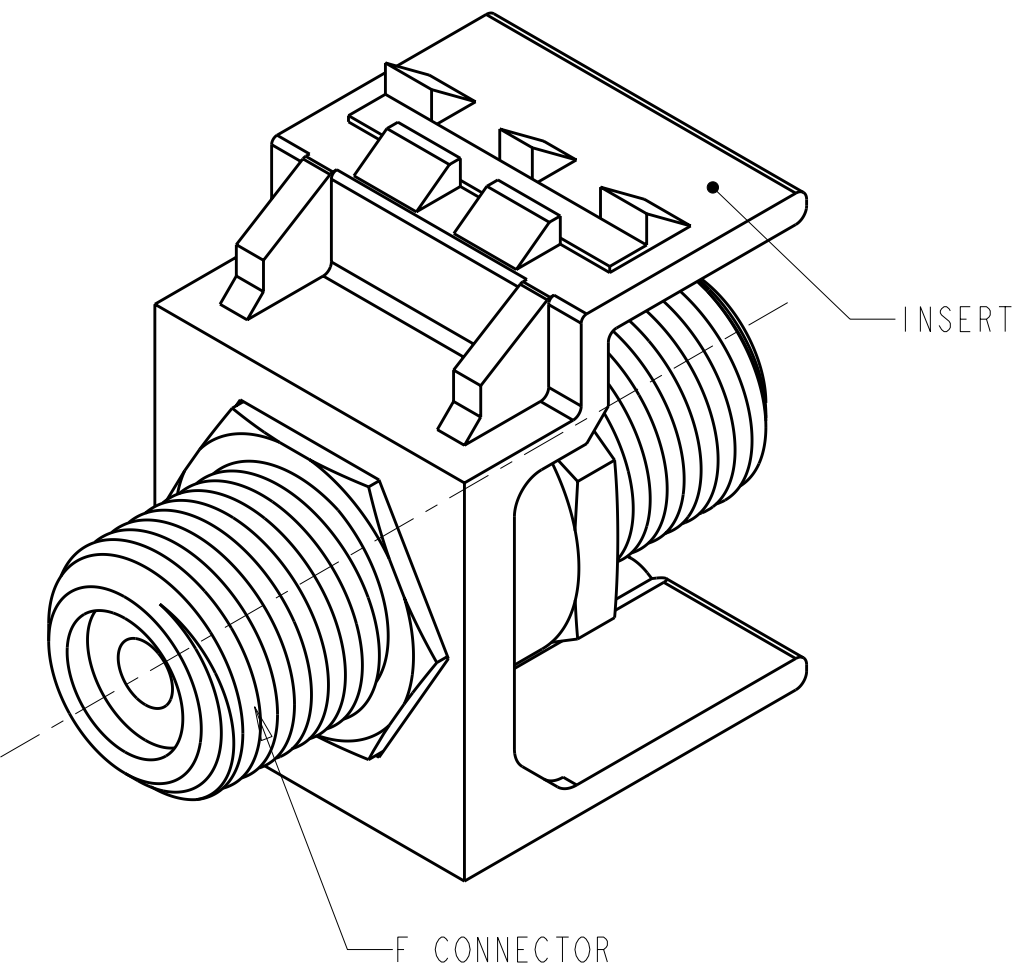
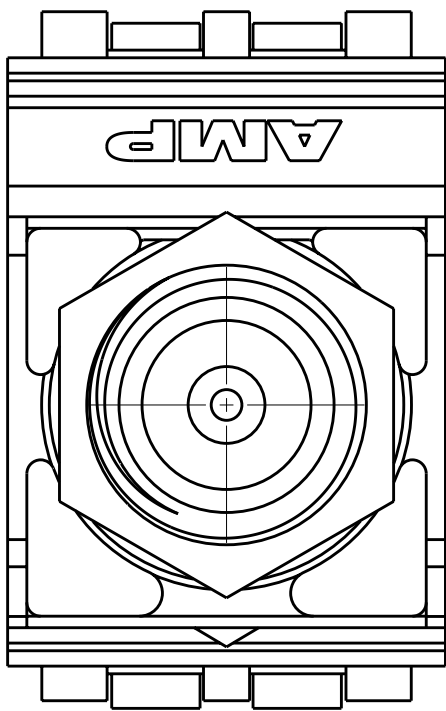


LOC	DIST	REVISIONS					
HM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REV; ECO-10-010362	18MAY2010	GG	RA
			C	REV ECO-11-005530	17MAR2011	LH	RA

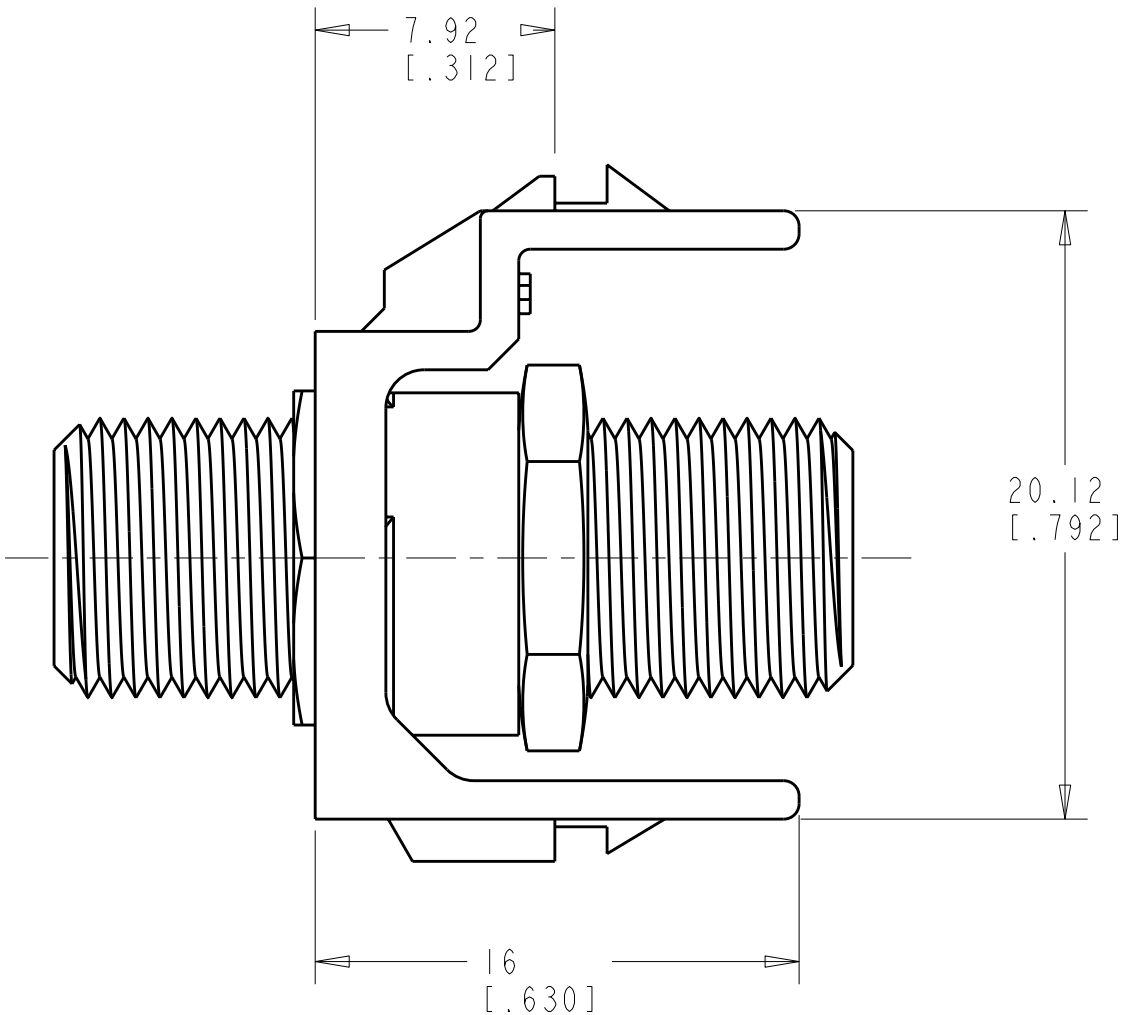

1. MATERIAL:
INSERT: POLYCARBONATE MOLDING COMPOUND.
SEE TABLE FOR COLOR.
CONNECTOR: NICKEL PLATED ZINC.
2. ELECTRICAL SPECIFICATION:
IMPEDANCE: 75 Ohms.
INSULATION RESISTANCE: 500M Ohms.
WITHSTAND VOLTAGE: 500 VAC ONE MINUTE.
VOLTAGE RATING: 150 VAC.
DURABILITY: 500 CYCLES.

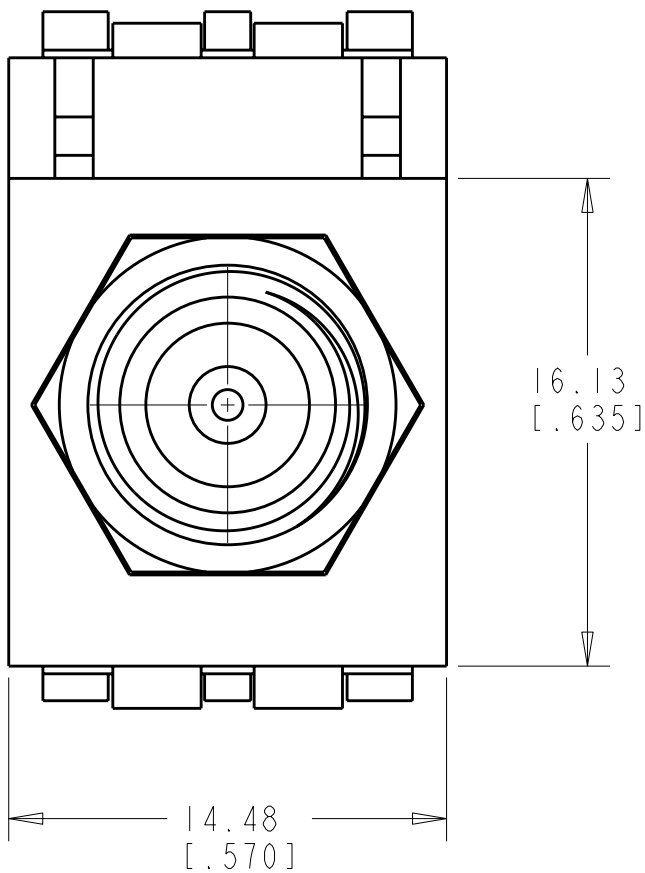

ALPINE WHITE	1-1499855-3
ELEC IVORY	1-1499855-1
GRAY	1499855-4
WHITE	1499855-3
BLACK	1499855-2
LT ALMOND	1499855-1
COLOR	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J MCNEAL 16 JAN 2006	TE Connectivity			
DIMENSIONS: mm (INCHES)		CHK G BOWMAN 23 MAR 2006				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G BOWMAN 23 MAR 2006	NAME ASSY, F INSERT, 2 GHz, SL SERIES			
0 PLC ± 1 PLC ± 2 PLC ±.13 [.005] 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	SIZE A2			
MATERIAL		CUSTOMER DRAWING	CAGE CODE 00779	DRAWING NO 1499855	RESTRICTED TO -	
		SCALE 4:1	SHEET 1	OF 1	REV C	