




Tripp Lite
 1111 West 35th Street
 Chicago, IL 60609 USA
 Telephone: +(773) 869 1234
 E-mail: saleshelp@tripplite.com

Model #: PDUV15

Single-Phase Basic PDU, 15A 120V, 0U Vertical Rackmount, 14 NEMA 5-15R outlets, NEMA 5-15P input plug

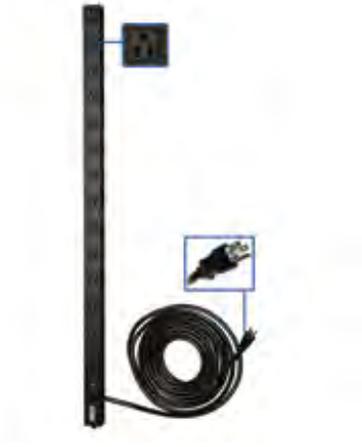

Highlights

- 15A 120V Basic Power Distribution Unit
- 0U Vertical Rackmount format with 36 in / .9m height
- 14 NEMA 5-15R outlets
- NEMA 5-15P input plug
- 15 ft. / 4.6m attached line cord
- Toolless mounting buttons and bolt-down brackets included

Description

Tripp Lite Basic Power Distribution Units / PDU systems offer reliable rackmount power distribution. Supplies equipment with continuous power from any protected UPS, generator or mains input power source. High quality design includes rugged all-metal housing and secure rackmount installation with included mounting accessories.

Applications

- Ideal for network power distribution in datacenters, computer rooms and network closets

Package Includes

- PDUV15 Basic Vertical PDU
- Mounting hardware
- Owner's manual with warranty information

Features

- PDUV15 offers highly reliable 15A 120V power distribution in a 36 in. / .9m 0U vertical rackmount format
- 14 NEMA 5-15R output receptacles
- NEMA 5-15P input plug
- 15 ft. / 4.6m attached line cord
- 15A resettable circuit breaker
- Switch-free design prevents accidental shutoff
- Toolless mounting buttons enable simple installation in Tripp Lite and other button-mount compatible equipment racks
- Rear facing installation buttons can be relocated to the left or right surface of the PDU for rear, center or forward-facing outlet orientation in compatible racks
- Included nut and bolt mounting brackets support installation in non button-mount compatible racks, wallmount and raceway applications

Specifications

OVERVIEW	
PDU Type	Basic
OUTPUT	

Frequency compatibility	50 / 60 Hz
Output VA	1800
Output nominal voltage	120V
Overload protection	15A
Outlet quantity / type	14 NEMA 5-15R
Outlet Type	NEMA 5-15R
INPUT	
Nominal Input Voltage(s) Supported	120V AC
PDU Input Voltage	100; 120; 127
Maximum Input Amps (A)	15
PDU Plug Type	NEMA 5-15P
Input cord length (ft.)	15
Input cord length (m)	4.57
Voltage compatibility (VAC)	120
Phase	Single-Phase
PHYSICAL	
Shipping weight (lbs)	3.8
Shipping weight (kg)	1.72
Unit Dimensions (HWD/in)	36 x 1.25 x 1.75
Unit Dimensions (HWD/cm)	91.44 x 3.18 x 4.45
Shipping Dimensions (HWD/in)	40 x 2.8 x 3
Shipping Dimensions (HWD/cm)	101.6 x 7.11 x 7.62
Unit weight (lbs)	3.3
Unit weight (kg)	1.50
Material of construction	Aluminum
Style	Vertical Rackmount, Wallmount, Raceway, Workbench
Form factors supported	Vertical (0U) mounting in rack enclosures, horizontal mount in raceways and a variety of other applications
PDU Form Factor	Vertical (0U)
SPECIAL FEATURES	
Appearance	Black housing
CERTIFICATIONS	
Certifications	Tested to UL60950-1 (USA) and CAN/CSA C22.2 No. 60950-1-03 (Canada), RoHS Compliant
WARRANTY	
Product Warranty Period (Worldwide)	5-year limited warranty

Related Items

Optional Products

Related Model	Description	Qty.
P006-006-13LA	6-ft. 18AWG Power cord (NEMA 5-15P to IEC-320-C13 Left Angle)	1
P006-006-13RA	6-ft. 18AWG Power cord (NEMA 5-15P to IEC-320-C13 Right Angle)	1
P022-001	1-ft. 18AWG Power Extension cord (NEMA 5-15R to NEMA 5-15P)	1
P023-001	1-ft. 14AWG Power Adapter cord (NEMA L5-15R to NEMA 5-15P)	1
P007-002	2-ft. Heavy-Duty 14AWG Power cord (IEC-320-C13 to NEMA 5-15P)	1
P030-002-5	5-Pack of 2-ft. 18AWG Power Cords NEMA 5-15P to IEC-320-C13)	1
P006-003	3-ft. 18AWG Power cord (NEMA 5-15P to IEC-320-C13)	1
P006-004	4-ft. 18AWG Power cord (NEMA 5-15P to IEC-320-C13)	1
P006-004-BL	4-ft. 18AWG Power Cord (NEMA 5-15P to IEC-320-C13) with Blue Connectors	1
P006-004-GN	4-ft. 18AWG Power Cord (NEMA 5-15P to IEC-320-C13) with Green Connectors	1
P006-004-RD	4-ft. 18AWG Power Cord (NEMA 5-15P to IEC-320-C13) with Red Connectors	1
P006-004-YW	4-ft. 18AWG Power Cord (NEMA 5-15P to IEC-320-C13) with Yellow Connectors	1
P006-006	6-ft. 18AWG Power cord (NEMA 5-15P to IEC-320-C13)	1
P006-006-2	6-ft. AC Power Splitter Cable (NEMA 5-15P to 2 x IEC-320-C13)	1
P006-006-515MF	6 ft. Piggyback Power Cord (NEMA 5-15P/R to IEC-320-C13)	1
P007-006	6-ft. Heavy-Duty 14AWG Power cord (IEC-320-C13 to NEMA 5-15P)	1
P034-010	10-ft. 14AWG Heavy Duty Power cord (IEC-320-C19 to NEMA 5-15P)	1
P006-010	10-ft. 18AWG Power cord (NEMA 5-15P to IEC-320-C13)	1
P007-010	10-ft. Heavy-Duty 14AWG Power cord (IEC-320-C13 to NEMA 5-15P)	1
P010-012	12-ft. 18AWG Power cord (NEMA 5-15P to IEC-320-C13)	1

More information, including related products, owner's manuals, and additional technical specifications, can be found online at www.tripplite.com/en/products/model.cfm?variables.txtModelID=3880.

Copyright © 2013 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.