


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

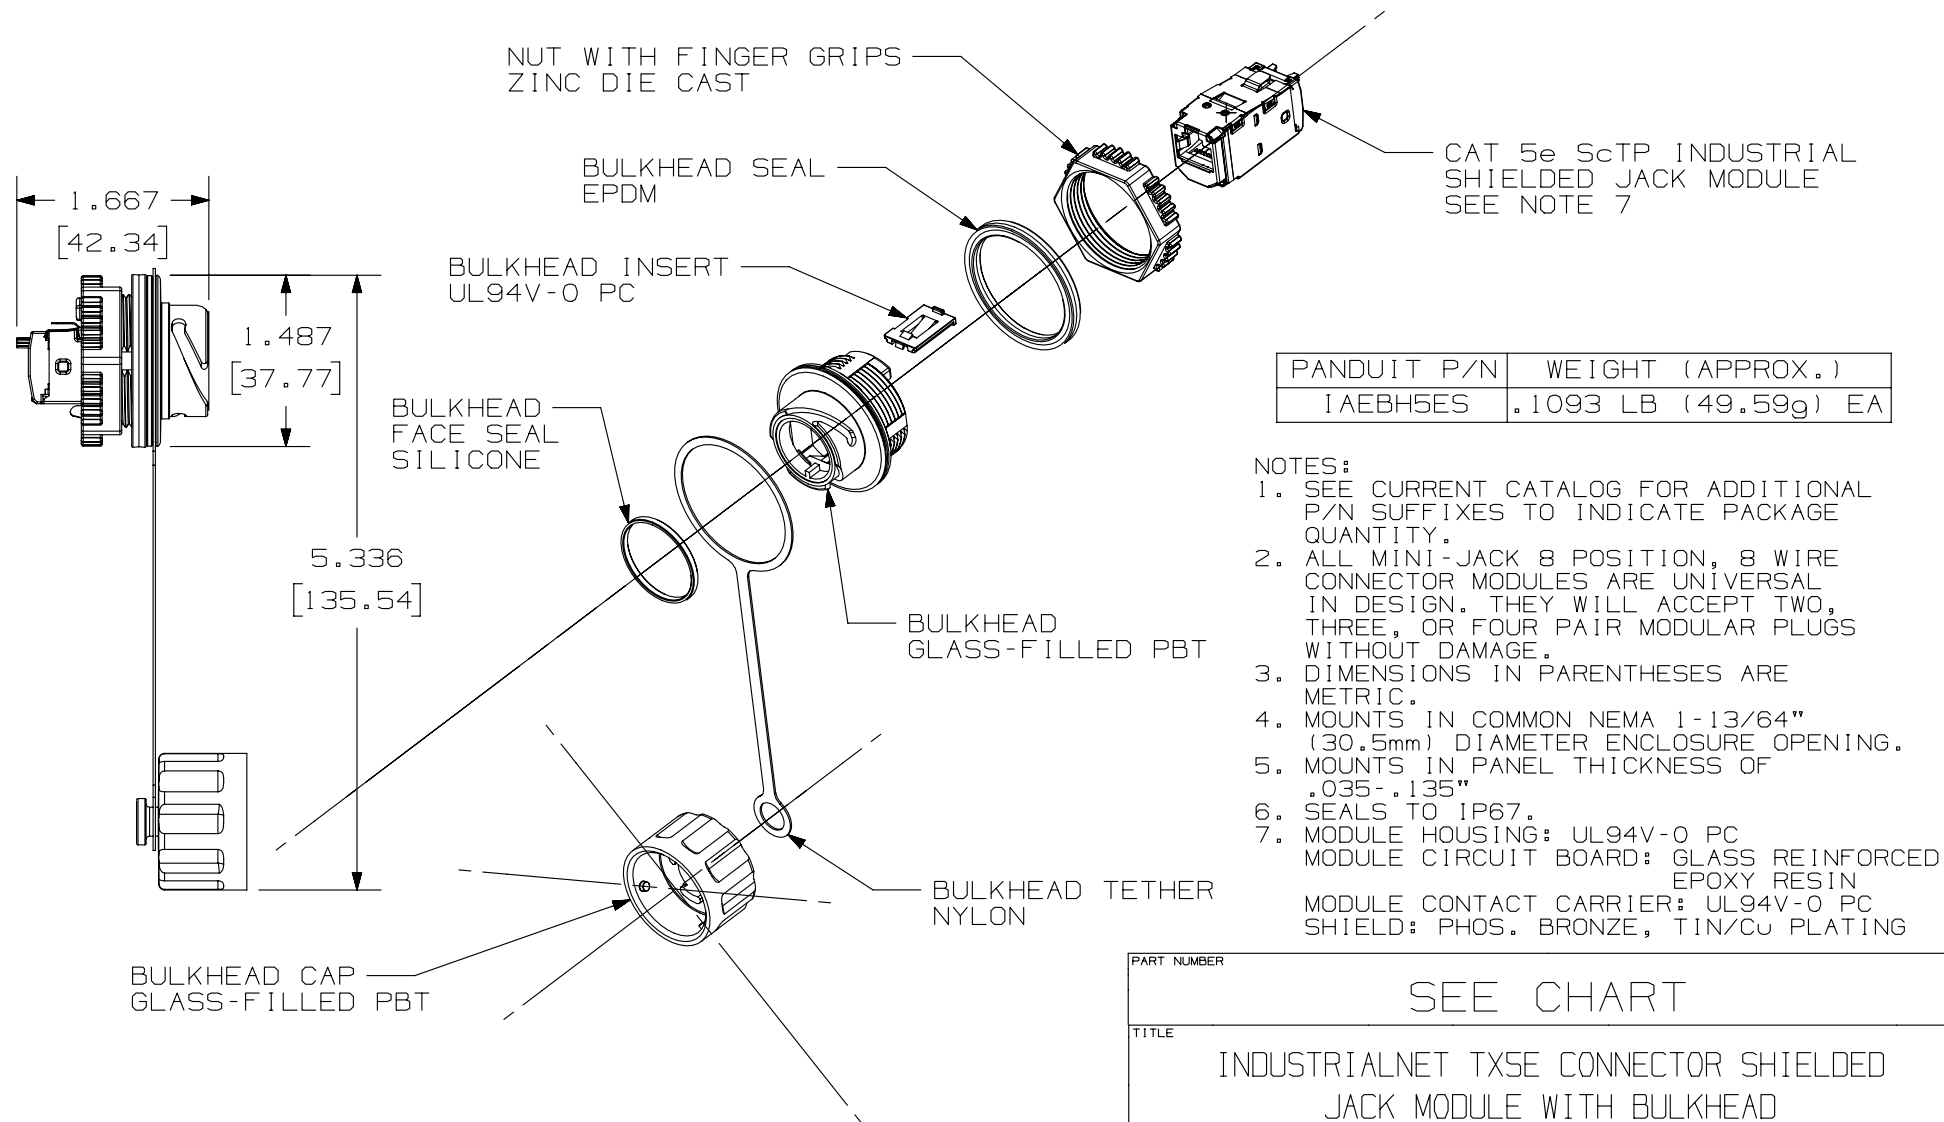

PANDUIT P/N	WEIGHT (APPROX.)
1AEBH5ES	.1093 LB (49.59g) EA

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL P/N SUFFIXES TO INDICATE PACKAGE QUANTITY.
2. ALL MINI-JACK 8 POSITION, 8 WIRE CONNECTOR MODULES ARE UNIVERSAL IN DESIGN. THEY WILL ACCEPT TWO, THREE, OR FOUR PAIR MODULAR PLUGS WITHOUT DAMAGE.
3. DIMENSIONS IN PARENTHESES ARE METRIC.
4. MOUNTS IN COMMON NEMA 1-13/64" (30.5mm) DIAMETER ENCLOSURE OPENING.
5. MOUNTS IN PANEL THICKNESS OF .035-.135"
6. SEALS TO IP67.
7. MODULE HOUSING: UL94V-0 PC
MODULE CIRCUIT BOARD: GLASS REINFORCED EPOXY RESIN
MODULE CONTACT CARRIER: UL94V-0 PC
SHIELD: PHOS. BRONZE, TIN/CU PLATING

PART NUMBER		SEE CHART	
TITLE			
INDUSTRIALNET TX5E CONNECTOR SHIELDED JACK MODULE WITH BULKHEAD CUSTOMER DRAWING			
ITEM REVISION NAME		M01245EZ/05	
DATASET FILE NAME		M01245EZ_DC76/05B	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		PANDUIT	
.X ± .XXX ± .010 [.3] .XX ± .03 [.8] ANGLES ±			
DRAWN BY BJN		DATE 10-30-06	
CHK CEF		SCALE NONE	
DRAWING NUMBER: 01245-76		SHT 1 OF 1	
REV		A	

REVISED TITLE BLOCK.
ALL PREVIOUS REVISIONS OMITTED FOR CLARITY.

01245-76

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
3	5-15-14	TA	REFR	REFR	REVISED TITLE BLOCK. ALL PREVIOUS REVISIONS OMITTED FOR CLARITY.	01245-76