


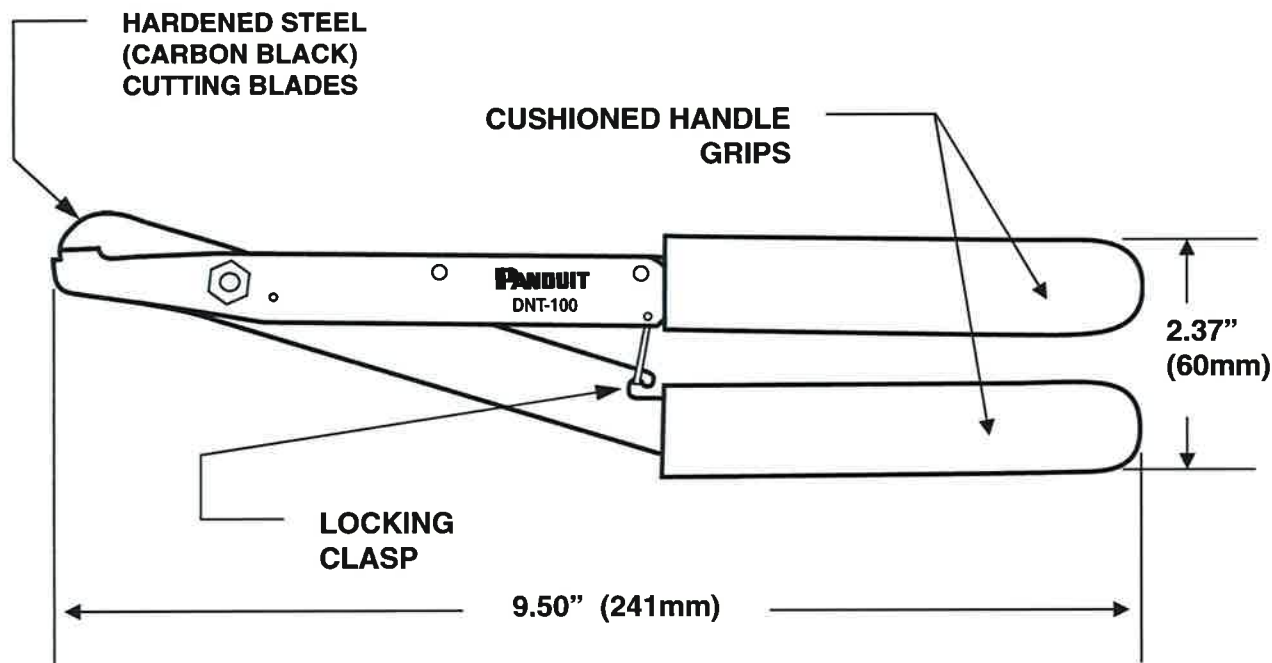


NOTES:

For use with Panduct Plastic Wiring Duct.

- Used to notch the duct sidewall down to the score line to facilitate finger breakouts for corner and 'T' junctions.
- Spring loaded in open position.
(Closed position shown in drawing.)

**DIMENSIONS ARE FOR
REFERENCE ONLY.**

WEIGHT: 9.1 oz.
(258 gr.)

							DNT-100 DUCT NOTCHING TOOL CUSTOMER DRAWING						
							ITEM REVISION NAME:				PANDUIT		
							WD24978A01_01						
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:				MATERIAL:		
							(.x) ± --- (.xxx) ± --- (.xx) ± --- ANGLES ± ---				-----		
							 THIRD ANGLE PROJECTION				DRAWING NUMBER: WD24978A01		
01	2-19-14	BLR	BJPU		UPD TEMPLATE & BRANDING	4713	DRAWN BY: BLR		DATE: 3-15-05	CHK MBR	SCALE NONE	SHT 1 OF 1	SIZE A
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN							