
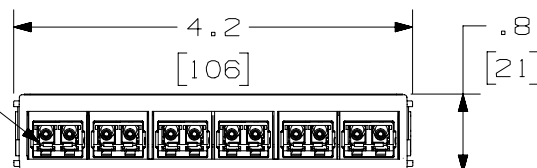
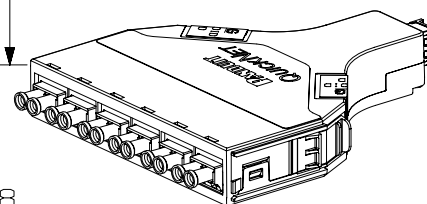


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FIBER POSITION

1 2 3 4 5 6 7 8 9 10 11 12

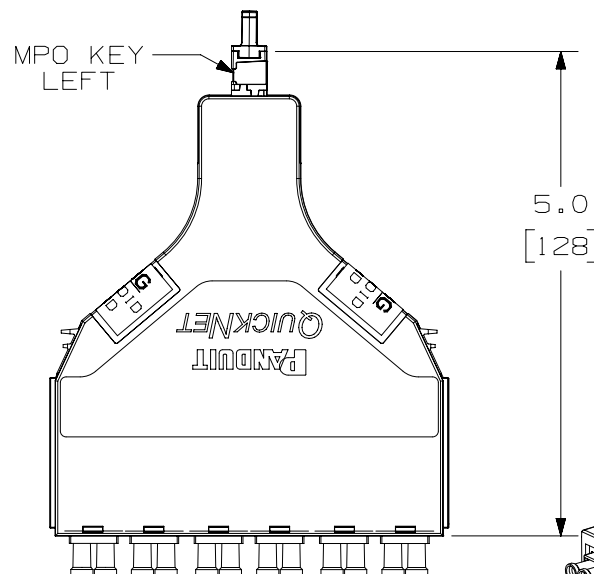

LC CONNECTOR
LATCH DOWN


FIBER POSITION

METHOD A 12F - CASSETTE (AS)												
MPO END / LC END	FIBER POSITION FROM MPO END TO LC END											
MPO POSITION	1	2	3	4	5	6	7	8	9	10	11	12
LC POSITION	1	2	3	4	5	6	7	8	9	10	11	12

PANDUIT PART NUMBER	FIBER TYPE	PERFORMANCE LEVEL	ADAPTER COLOR (SPLIT SLEEVE)
FQ6N-12-10AS	OM1	STANDARD LOSS	ELECTRIC IVORY (PHOS BRONZE)
FQ5N-12-10AS	OM2	STANDARD LOSS	BLACK (PHOS BRONZE)
FQXN-12-10AS	OM3	STANDARD LOSS	AQUA (ZIRCONIA)
FQX0-12-10AS	OM3	OPTIMIZED LOSS	AQUA (ZIRCONIA)
FQZN-12-10AS	OM4	STANDARD LOSS	AQUA (ZIRCONIA)
FQZ0-12-10AS	OM4	OPTIMIZED LOSS	AQUA (ZIRCONIA)
FQSA-12-10AS	OM4+ (SIG CORE)	ULTRA LOW LOSS	AQUA (ZIRCONIA)
FQ9N-12-10AS	OS1/OS2	STANDARD LOSS	BLUE (ZIRCONIA)

NOTES:

1. SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITIES.
2. SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
3. MATERIALS:
 - A. MODULE MATERIAL: PLASTIC
 - B. ADAPTER: COMPOSITE PLASTIC
4. CASSETTE MODULE WEIGHT:
2.4oz [69.0g]
5. DIMENSIONS IN BRACKETS ARE METRIC
6. METHOD A CASSETTES COMPLY WITH
ANSI/TIA-568-C.O. SEE
ANSI/TIA-568-C.O.FOR POLARITY
DETAILS AND EXAMPLE OF A
BASIC LINK.

PART NUMBER						FQ** - 12-10AS					
TITLE											
QUICKNET SFQ SERIES CASSETTE, 12 FIBER DUPLEX LC TO MPO CASSETTE METHOD A											
CUSTOMER DRAWING											
ITEM REVISION NAME						PANDUIT					
M02947ZE/04											
DATASET FILE NAME											
M02947ZE_DC/04A											
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]						MATERIAL:					
.X ± .XXX ± .XX ± ANGLES ±											
						DRAWING NUMBER: 02947-39					
THIRD ANGLE PROJECTION											
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1				SIZE			
EFK	07-17-09	MTV	NONE					A			