
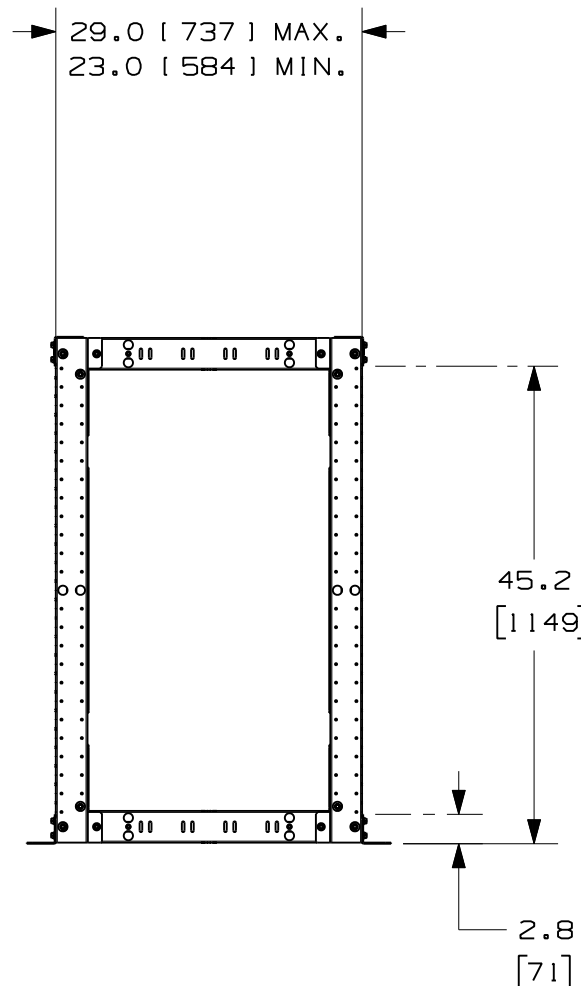


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
1AR4P48CN	72.0 LBS/EACH 33 Kg/EACH

NOTES:

- VISIT OUR ON-LINE CATALOG AT [WWW.PANDUIT.COM](http://WWW.PANDUIT.COM) FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- DIMENSIONS IN PARENTHESIS ARE METRIC.
- ADJUSTABLE FRONT TO BACK RAILS CAN BE ADJUSTED TO EITHER 23" [584mm] OR 29" [737mm] IN DEPTH.
- CAN BE USED WITH ANY EIA STANDARD COMPONENT IN ADDITION TO ALL PANDUIT HORIZONTAL CABLE MANAGEMENT AND PATCH PANEL PRODUCTS.
- 24 AVAILABLE RACK SPACES.
- EIA UNIVERSAL STANDARD HOLE PROGRESSION ON FRONT CHANNELS AND REAR MOUNT RAILS .625", .625", .500", .625", .625", .500"...ETC.
- ALL RACKS WILL HAVE NUMBERS UP ORIENTATION (RU "01" ON BOTTOM, RU "24" ON TOP).
- RU SPACING NUMBERS ARE CLEARLY PRINTED ON MOUNTING RAILS.
- ALL ASSEMBLY HARDWARE INCLUDED:
  - (16) 3/8-16 X 1" HEX BOLT
  - (16) 3/8" PAINT PIERCING GROUNDING WASHER
  - (40) 5/16-18 SERRATED HEAD BOLTS
  - (1) TUBE OF ANTI-OXIDIZING PASTE
  - (1) BAG OF #12-24 CAGE NUTS (25)
  - (1) BAG OF #12-24 SCREWS (25)
- FULLY BONDED STRUCTURE WHEN ASSEMBLED PER INSTRUCTIONS.
- LOAD RATING - 2000 LBS (907Kg).

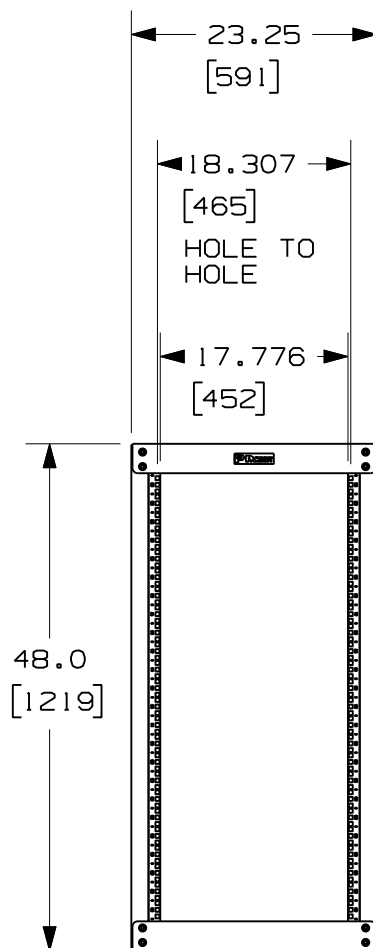

MODEL FILENAME		12V312AA/01.PRT	
CAD FILENAME/LAYERS		12V312AA_DC/01A.PRT	
PANDUIT CORP. TINLEY PARK, ILLINOIS			
INDUSTRIAL 4-POST RACK 24RU CAGE NUT RAILS (1AR4P48CN) CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±                    (.XXX) ± (.XX) ±                    ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY BKA	MAT'L:  STEEL	SCALE NONE	
DATE 9/23/2012		DRAWING NO. 12V312AA-DC	
CHK'D BAME		SHEET 1 OF 2	
		DWG A SIZE	

01A	11/28/12	BKA	BAME	GEOMETRY UPDATED, RE-RELEASED	12V312AA-DC		CMK		
00A	9/23/12	BKA	BAME	RELEASED TO PRODUCTION	12V312AA-DC		CMK		
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH

12V312AA/01

