



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
FST24H3	.2 LB/EA 90 g/EACH

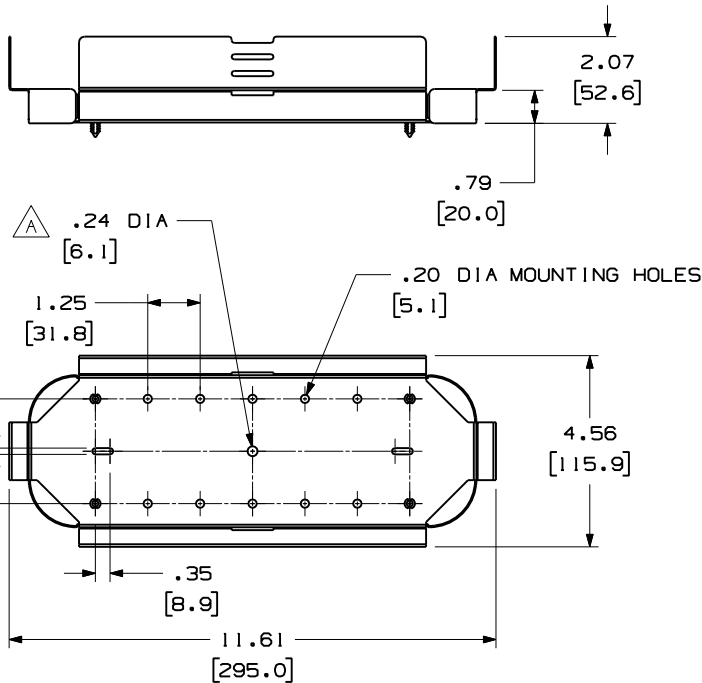

- NOTES:
- SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
 - DIMENSIONS IN PARENTHESIS ARE METRIC.
 - SPLICE TRAY HOLDER WILL ACCOMMODATE UP TO (3) FST24 SPLICE TRAYS.
 - SPLICE TRAY HOLDER IS SUPPLIED WITH 1 TY-TAK AND 4 PUSH FASTENERS
 - MATERIAL - ALUMINUM

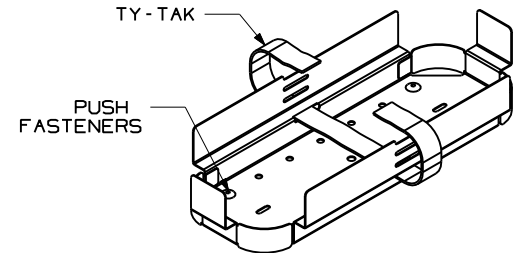

MODEL FILENAME		V10049FN_FST24H3_ASSY_01.prt	
CAD FILENAME/LAYERS		V10049FN_DC_01A.prt (1)	
PANDUIT CORP. TINLEY PARK, ILLINOIS			
SPLICE TRAY HOLDER (FST24H3) CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .03 (.XX) ± .015		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
.XXX ± .005 ANGLES ± 1°			
DRAWN BY JDWE		SCALE NONE	
DATE 5-2-02		DRAWING NO.	
CHK'D		10049-59	
SEE NOTES		DWG A SIZE	

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
O1	5-10-02	RYB		A. ADD .24 DIA HOLE; B. ADD .15 X .35 SLOTS (2X);	10049-59				
R	5-2-02	JDWE		RELEASED TO PRODUCTION	10049-59				