

# SCV-5083R

1000TVL (1280H) WDR Vandal-Resistant IR Dome Camera




## Key Features

- High resolution of 1000TV lines (Color), 1000TV lines (B/W)
- Min. Illumination 0Lux (IR LED on), IR distance 30m
- 3.3x varifocal lens (3 ~ 10mm)
- 120dB WDR, Day & Night (ICR)
- SSDR, SSNRIV, Defog, Intelligent video analytics
- IP66, IK10, Coax : Pelco-C (Coaxitron), RS-485, Dual power

## Dimensions

Unit : mm (inch)

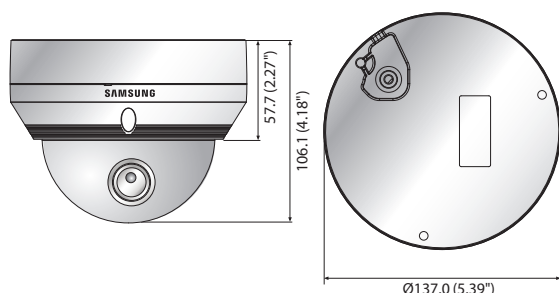

## Accessories (Optional)



|                                  | SCV-5083RN                                                                                                                                            |                          | SCV-5083RP |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------|
| VIDEO                            |                                                                                                                                                       |                          |            |
| Imaging Device                   | 1/3" 1.3M CMOS                                                                                                                                        |                          |            |
| Total Pixels                     | 1,312(H) × 1,069(V)                                                                                                                                   |                          |            |
| Effective Pixels                 | 1,305(H) × 1,049(V)                                                                                                                                   |                          |            |
| Scanning System                  | Progressive scan                                                                                                                                      |                          |            |
| Synchronization                  | Internal                                                                                                                                              |                          |            |
| Frequency                        | H : 15.734KHz / V : 59.94Hz                                                                                                                           | H : 15.625KHz / V : 50Hz |            |
| Horizontal Resolution            | Color : 1000TV lines, B/W : 1000TV lines                                                                                                              |                          |            |
| Min. Illumination                | Color : 0.05Lux (F1.4, 50IRE), 0.001Lux (1sec, F1.4, 50IRE),<br>0.02Lux (F1.4, 30IRE), 0.0006Lux (1sec, F1.4, 30IRE)<br>B/W : 0Lux (IR LED on)        |                          |            |
| S / N Ratio                      | 52dB (AGC off, Weight on)                                                                                                                             |                          |            |
| Video Output                     | CVBS : 1.0Vpp / 75Ω composite                                                                                                                         |                          |            |
| LENS                             |                                                                                                                                                       |                          |            |
| Focal Length (Zoom Ratio)        | 3 ~ 10mm (3.3x) varifocal                                                                                                                             |                          |            |
| Max. Aperture Ratio              | F1.4                                                                                                                                                  |                          |            |
| Angular Field of View            | H : 82.0°(Wide) ~ 26.5°(Tele) / V : 59.7°(Wide) ~ 19.9°(Tele)                                                                                         |                          |            |
| Min. Object Distance             | 0.5m (1.64ft)                                                                                                                                         |                          |            |
| Focus Control                    | Manual                                                                                                                                                |                          |            |
| Lens Type                        | DC auto iris                                                                                                                                          |                          |            |
| Mount Type                       | Board type                                                                                                                                            |                          |            |
| PAN / TILT / ROTATE              |                                                                                                                                                       |                          |            |
| Pan Range                        | 0° ~ 354°                                                                                                                                             |                          |            |
| Tilt Range                       | 0° ~ 68°                                                                                                                                              |                          |            |
| Rotate Range                     | 0° ~ 355°                                                                                                                                             |                          |            |
| OPERATIONAL                      |                                                                                                                                                       |                          |            |
| On Screen Display                | English, Chinese, Korean, Japanese, German, Italian, French, Spanish, Russian, Czech, Polish, Romanian, Serbian, Swedish, Danish, Turkish, Portuguese |                          |            |
| Camera Title                     | Off / On (Displayed 15 characters)                                                                                                                    |                          |            |
| Day & Night                      | Auto (ICR) / External / Color / B/W                                                                                                                   |                          |            |
| Anti IR Saturation               | Top / Bottom / Left / Right                                                                                                                           |                          |            |
| Backlight Compensation           | Off / User BLC / HLC / WDR                                                                                                                            |                          |            |
| Wide Dynamic Range               | 120dB                                                                                                                                                 |                          |            |
| Contrast Enhancement             | SSDR (Off / On)                                                                                                                                       |                          |            |
| Digital Noise Reduction          | SSNR IV (Off / On)                                                                                                                                    |                          |            |
| Defog                            | Off / Auto / Manual                                                                                                                                   |                          |            |
| Purple Fringe Reduction          | Off / Low / Middle / High                                                                                                                             |                          |            |
| Digital Image Stabilization      | Off / On                                                                                                                                              |                          |            |
| Tampering                        | Off / On                                                                                                                                              |                          |            |
| Motion Detection                 | Off / On                                                                                                                                              |                          |            |
| Intelligent Video Analytics      | Fence, (Dis)Appear, Counting (Off / On)                                                                                                               |                          |            |
| Privacy Masking                  | Off / On (24 programmable zones with 4 points polygonal masking)                                                                                      |                          |            |
| Gain Control                     | Off / Low / Middle / High                                                                                                                             |                          |            |
| White Balance                    | ATW / Outdoor / Indoor / Manual / AWC / Mercury (1,800K° ~ 10,500K°)                                                                                  |                          |            |
| Electronic Shutter Speed         | 1sec ~ 1/12,000sec                                                                                                                                    |                          |            |
| Digital Zoom                     | Off / On (1x ~ 16x)                                                                                                                                   |                          |            |
| Reverse                          | Off / H-Rev / V-Rev / HV-Rev                                                                                                                          |                          |            |
| Profile                          | Basic, Day & Night, Backlight, ITS, Indoor, User                                                                                                      |                          |            |
| Alarm                            | 1 Out                                                                                                                                                 |                          |            |
| Communication                    | Coaxial control (SPC-300 compatible), RS-485                                                                                                          |                          |            |
| Protocol                         | Coax : Pelco-C (Coaxitron)<br>RS-485 : Samsung-T/E, Pelco-D/P, Panasonic, Bosch, Honeywell, Vicon, AD, GE                                             |                          |            |
| IR Distance                      | 30m (98.43ft) (IR LED 12ea)                                                                                                                           |                          |            |
| ENVIRONMENTAL                    |                                                                                                                                                       |                          |            |
| Operating Temperature / Humidity | -30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH<br>*Start up should be done at above -10°C (+14°F)                                                  |                          |            |
| Ingress Protection               | IP66                                                                                                                                                  |                          |            |
| Vandal Resistance                | IK10                                                                                                                                                  |                          |            |
| ELECTRICAL                       |                                                                                                                                                       |                          |            |
| Input Voltage / Current          | Dual (24V AC & 12V DC ±10%)                                                                                                                           |                          |            |
| Power Consumption                | Max. 6W                                                                                                                                               |                          |            |
| MECHANICAL                       |                                                                                                                                                       |                          |            |
| Color / Material                 | Ivory / Aluminum                                                                                                                                      |                          |            |
| Dimensions (W×H)                 | Ø137.0 x 106.1mm (Ø5.39" x 4.18")                                                                                                                     |                          |            |
| Weight                           | 750g (1.65 lb)                                                                                                                                        |                          |            |

\* The latest product information / sepecification can be found at <http://security.hanwhatechwin.com>