



FD8169

Fixed Dome Network Camera

2MP · 15M IR · 3DNR

VIVOTEK FD8169 is an easy-to-use fixed dome network camera specifically designed for indoor security applications with a compact, stylish exterior. Equipped with a 2MP sensor enabling viewing resolution of 1920x1080 at a smooth 30 fps, the FD8169 is an all-in-one camera capable of capturing high quality and high resolution video up to 2 Megapixel.


In order to adapt to constantly changing lighting conditions, the FD8169 features a removable IR-cut filter as well as improved IR illuminators effective up to 15M for superior image quality around the clock. Featuring 3D Noise Reduction Technology, it enables the FD8169 to capture clear, polished video under low-light conditions, which also helps to reduce bandwidth from sensor noise.

The FD8169 supports the industry-standard H.264 compression technology, drastically reducing file sizes and conserving valuable network bandwidth. With H.264, and MJPEG compatibility both included, multiple streams can be simultaneously transmitted in any of these formats at different resolutions, frame rates, and image qualities for versatile platforms. Thereby it further optimizes bandwidth and storage efficiency.


Incorporating a number of advanced features standard for VIVOTEK cameras, including tamper detection, 802.3af compliant PoE, MicroSD/SDHC/SDXC card slot, and VIVOTEK's 32-channel recording software, the FD8169 is the ideal solution for your indoor surveillance needs.

Key Features

- 2-Megapixel CMOS Sensor
- 30 fps @ 1920x1080
- Real-time H.264, MJPEG Compression (Dual Codec)
- Removable IR-cut Filter for Day & Night Function
- Built-in IR Illuminators, Effective up to 15 Meters
- Built-in 802.3af Compliant PoE
- Built-in MicroSD/SDHC/SDXC Card Slot for On-board Storage
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability
- 3D Noise Reduction
- Smart IR Technology to Avoid Overexposure
- WDR Enhancement for Unparalleled Visibility in Extremely Bright and Dark Environments




Library



Bank



Retail



Restaurant

Technical Specifications

Model	FD8169 (f = 2.8 mm) FD8169-F3 (f = 3.6 mm)
System Information	
CPU	Multimedia SoC (System-on-Chip)
Flash	128MB
RAM	256MB
Camera Features	
Image Sensor	1/2.7" Progressive CMOS
Maximum Resolution	1920x1080 (2MP)
Lens Type	Fixed-focal
Focal Length	f = 2.8 mm f = 3.6 mm (FD8169-F3)
Aperture	F2.0
Field of View	FD8169: 105° (Horizontal) 87° (Vertical) 135° (Diagonal) FD8169-F3: 93° (Horizontal) 50° (Vertical) 116° (Diagonal)
Shutter Time	1/5 sec. to 1/32,000 sec.
WDR Technology	WDR Enhanced
Day/Night	Removable IR-cut filter for day & night function
Minimum Illumination	1.22 Lux @ F2.0 (Color) 0.008 Lux @ F2.0 (B/W) 0 Lux @ IR LED ON
Pan Range	348°
Tilt Range	70°
Rotation Range	345°
Pan/tilt/zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built-in)
IR Illuminators	Built-in IR illuminators, effective up to 15 meters with Smart IR LED*6
On-board Storage	MicroSD/SDHC/SDXC card slot
Video	
Compression	H.264 & MJPEG
Maximum Frame Rate	30 fps @ 1920x1080 In both compression modes
Maximum Streams	3 simultaneous streams
S/N Ratio	Above 53 dB
Dynamic Range	54.5 dB
Video Streaming	Adjustable resolution, quality and bitrate Configurable video cropping for bandwidth saving
Image Settings	Adjustable image size, quality and bit rate Time stamp, text overlay, flip & mirror Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks Scheduled profile settings, 3D Noise Reduction
Network	
Users	Live viewing for up to 10 clients
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP
Interface	10Base-T/100 BaseTX Ethernet (RJ-45)
ONVIF	Supported, specification available at www.onvif.org

Intelligent Video

Video Motion Detection Triple-window video motion detection

Alarm and Event

Alarm Triggers Video motion detection, manual trigger, periodical trigger, system boot, recording notification, camera tampering detection

Alarm Events Event notification using digital output, HTTP, SMTP, FTP and NAS server
File upload via HTTP, SMTP, FTP and NAS server

General

Connectors RJ-45 for Network/PoE connection

LED Indicator System power and status indicator

Power Input DC 12V
IEEE 802.3af PoE Class 3

Power Consumption Max: 6.5 W (DC12V)
Max: 7.5 W (PoE)

Dimensions Ø: 128 mm x 98 mm

Weight Net: 435 g

Safety Certifications CE, LVD, FCC Class B, VCCI, C-Tick

Operating Temperature Starting Temperature: 0°C ~ 50°C
Working Temperature: -10°C ~ 50°C

Warranty 24 months

System Requirements

Operating System Microsoft Windows 7/Vista/XP/2000

Web Browser Mozilla Firefox 7~10 (streaming only)
Internet Explorer 7/8/9


Other Players VLC: 1.1.11 or above
QuickTime: 7 or above

Included Accessories

CD User's manual, quick installation guide, Installation Wizard 2, ST7501 32-channel recording software

Others Quick installation guide, warranty card, alignment sticker, screw pack

Dimensions

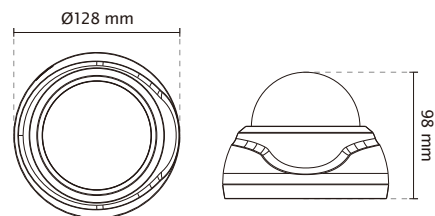

Compatible Accessories

Mounting Kits



AM-51A
Mounting Adapter



AM-520
Mounting Adapter



AM-214
L shape bracket



AM-712
Conduit Box

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Distributed by:



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho,
New Taipei City, 235, Taiwan, R.O.C.
T: +886-2-82455282 F: +886-2-82455532
E: sales@vivotek.com

VIVOTEK USA
2050 Ringwood Avenue,
San Jose, CA 95131
T: 408-773-8686 F: 408-773-8298
E: salesusa@vivotek.com

VIVOTEK Europe
Randstad 22-133, 1316BW Almere,
The Netherlands
T: +31(0)36-5298-434
E: saleseurope@vivotek.com

Ver 2.0