
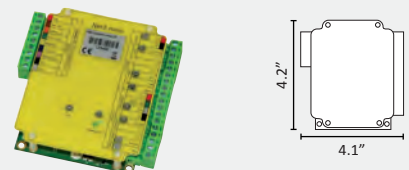


NET2 NANO		Example of a system using wireless with Net2 nano controllers	
Two DOOR KITS	Two door wireless access starter kit, 12/24V supply,*  Included: 2 - Net2 nano controller, plastic cabinet 2 - P50M readers 1 - Enrollment reader USB 10 - Keyfobs & 10 cards 1 - Pro software 1 - Net2Air Bridge Sales code 654-210-US More info http://paxton.info/1298	• A wireless single door controller • Communicates to the server PC using Net2Air technology via a Net2Air bridge • No cable required between Net2 nano and the server PC, reducing installation time • Recommended optimum distance of 50ft (15m) between Net2Air bridge and Net2 nano	
	Net2 nano 12/24V AC/DC PSU in metal cabinet*  Sales code 654-910-US More info http://paxton.info/1298		
BOARD ONLY	Net2 nano 1 door access control unit  Sales code 654-943-US More info http://paxton.info/1298	NET2AIR BRIDGE Net2Air bridge - Ethernet, PoE, Plastic housing  Sales code 477-500-US More Info http://paxton.info/1391	
	Net2 nano 1 door ACU in plastic housing  Sales code 654-549-US More info http://paxton.info/1298		

* Requires 24V 55VA transformer - not supplied.