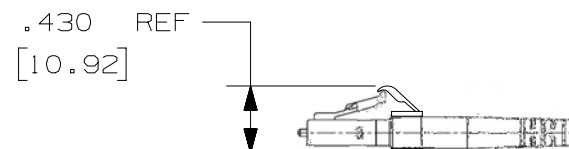
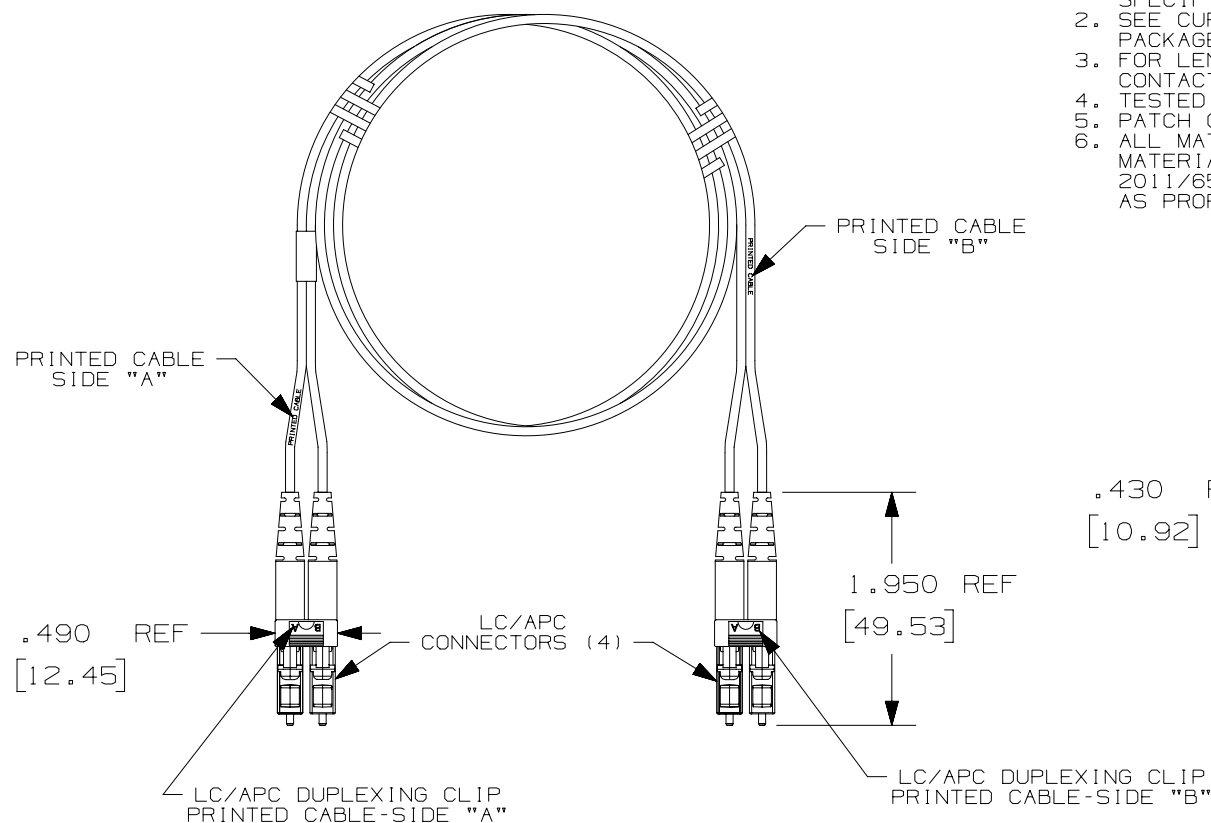


NOTES :



1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-C.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

[illegible]

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX LC/APC TO DUPLEX LC/APC FIBER OPTIC PATCH CORD					
PANDUIT PART NO.	CABLE				LC/APC CONNECTOR
	RATING	FIBER TYPE	COUNT	COLOR	BOOT COLOR
F82ELBNBNSN****	LOW SMOKE ZERO HALOGEN (LSZH)	9/125 1.6mm DUPLEX ZIPCORD G.657 A2/B2	DUPLEX 1.6mm ZIPCORD	YELLOW	GREEN
F92ERBNBNSN****	RISER (OFNR)	9/125 1.6mm DUPLEX ZIPCORD			
F92EPBNBNSN****	PLENUM (OFNP)				
F92ELBNBNSN****	LOW SMOKE ZERO HALOGEN (LSZH)				

**** - THE FIRST * DENOTES UNITS (M = METERS & F = FEET)
*** - DENOTES LENGTH 000 TO 050

							TITLE FIBER OPTIC PATCH CORD DUPLEX LC/APC TO DUPLEX LC/APC CUSTOMER DRAWING					
							ITEM REVISION NAME 15F307AC/00					
							DATASET FILE NAME 15F307AC_DC/00C					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .010 [0.3] .XX ± .03 [0.8] ANGLES ±					
							 THIRD ANGLE PROJECTION					
02	11-23-15	SAT	DWW	RWB	RELEASED TO PRODUCTION	15F307AC-DC	PART NO. SEE TABLE					
							DRAWING NUMBER: 15F307AC-DC					
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY SAT	DATE 08-05-15	CHK DWW	SCALE NONE	SHT 2 OF 2	SIZE A