


Specifications


Features	
Readers per interface	1
Entry confirmation input	Yes
Maximum cable extension length between ACU and interface	328ft
Maximum cable extension length between interface and reader	49ft
Read range: P38	33.5"
Read range: P50	43.3"
Read range: P75	59"
Read range: P200	98.4"
Read range: P200 metal mount	78.7"
Clock and data bit period	600µs
Documentation	
More information	http://paxton.info/1359

Documentation	
Installation instructions	http://paxton.info/775
Specifications	http://paxton.info/1807
Hardware	
Operating voltage	Min 11V DC - Max 14V DC
Current consumption	80 mA
Carrier frequency	2.4GHz
Operating temperature	Min -4°F - Max +131°F
Waterproof	No - If used externally, it must be protected in a weatherproof housing
Cable type for extensions	Belden 9540
Additional power supply required	No

How it works

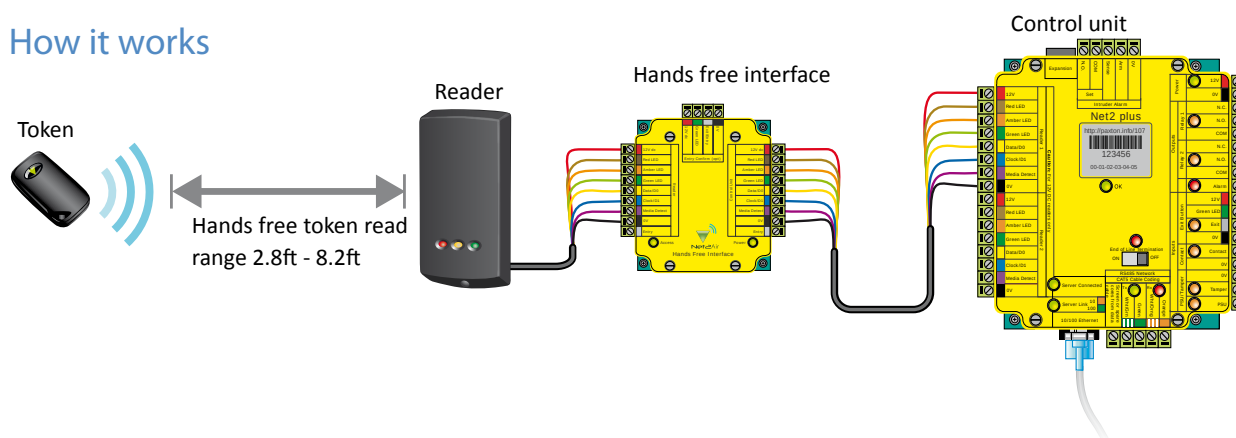


Hands free interface in plastic housing

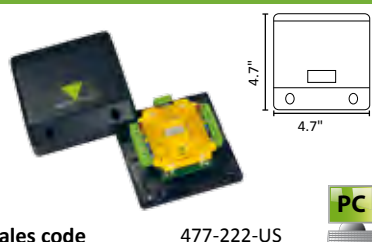

Sales code 477-222-US
More information <http://paxton.info/1359>

Net2 hands free keyfob



Sales code 690-222-US
More information <http://paxton.info/1431>

All information correct at the point of publication, but may be subject to change without notice.