




- Economical And Easy To Install
- Resists Gasoline, Engine Chemicals And Cleaning Solvents
- Expands Up To 150%
- Cut And Abrasion Resistant
- FMVSS 302 Approval

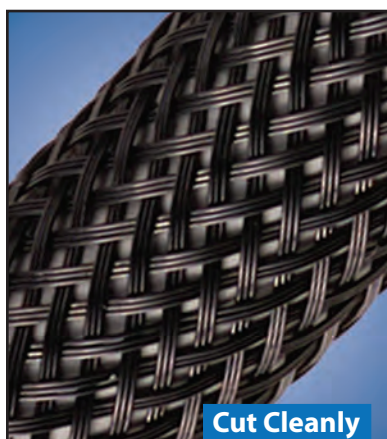

Cut Cleanly
Hot Knife

Material

Polyethylene Terephthalate

Grade

PTN

Monofilament Diameter

.010"

Drawing Number

TF001PET-WD



TECHFLEX
Braided Sleeving Products

www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/ 100'
		Min	Max				
1/16"	PTN0.06	3/64"	3/32"	1,000'	250'		0.22
1/8"	PTN0.13	3/32"	1/4"	1,000'	225'		0.20
1/4"	PTN0.25	1/8"	7/16"	1,000'	200'		0.30
5/16"	PTN0.31	5/32"	15/32"	500'	150'		0.50
3/8"	PTN0.38	3/16"	1/2"	500'	125'		0.57
7/16"	PTN0.44	7/32"	5/8"	500'	125'		0.68
1/2"	PTN0.50	1/4"	3/4"	500'	100'		0.77
9/16"	PTN0.56	5/16"	7/8"	500'	100'	more	0.81
5/8"	PTN0.63	3/8"	1"	500'	100'	than	0.95
3/4"	PTN0.75	1/2"	1 1/4"	250'	75'	30	1.20
1"	PTN1.00	5/8"	1 5/8"	250'	65'		1.34
1 1/4"	PTN1.25	3/4"	1 3/4"	250'	50'		1.60
1 1/2"	PTN1.50	1"	2 1/8"	200'	40'		1.96
1 3/4"	PTN1.75	1 1/4"	2 3/4"	200'	30'		2.45
2"	PTN2.00	1 1/2"	3 1/2"	200'	50'		2.60
2 1/2"	PTN2.50	1 3/4"	3 5/8"	200'	50'		3.80
3"	PTN3.00	2 1/2"	4 3/4"	100'	50'	BK,CL,NB,RE	4.00
3 END CONSTRUCTION							
1/4"	PT30.25	1/8"	3/8"	1,000'	200'	4	0.39
9 MIL CONSTRUCTION							
4"	PT94.00BK	4"	6 1/2"	100'	50'	BK	3.80
PET LEAN							
3/4"	PTL0.75BK	1/2"	1 1/4"	250'	75'	BK	1.04
1 1/4"	PTL1.25BK	3/4"	1 3/4"	250'	50'	BK	1.19


A Versatile Bundling And Protection Solution

The FLEXO® Original braided from 10 mil polyethylene terephthalate (PET) monofilament yarns. The material has a wide operating temperature range, is resistant to chemical degradation, UV radiation, and abrasion. Used in electronics, automotive, marine and industrial wire harnessing applications where cost efficiency and durability are critical.

The unique braided construction and wide expandability allows quick and easy installation over large connectors and long runs.

High thermal and chemical resistance and wide color/size selection make FLEXO® Original PET ideal for customizing and protecting the wires, hoses and cables in custom and classic colors.

Colors Available:
See color chart

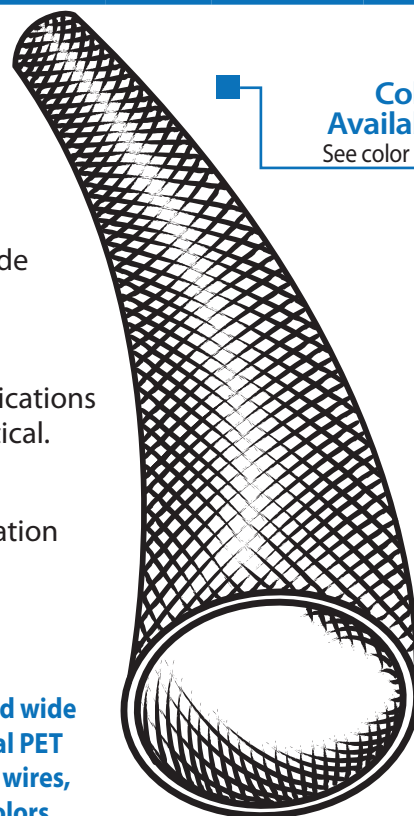



ABRASION FLAMMABILITY

Abrasion Resistance
High

Rating _____ UL94VO, FAR25,
FMVSS-302

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
77°F

Humidity
72%

Two Broken Filament
300 Test Cycles

Approximately 6 Broken
Filaments
500 Test Cycles

Material Destroyed
- Very Visible Hole In
Material
1,150 Test Cycles

Pre-Test Weight
4,547.4 mg

Post-Test Weight
4,133.9 mg

Test End Loss Of Mass
Point Of Destruction
413.5 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)



PHYSICAL PROPERTIES


Monofilament Diameter _____	.010
ASTM D-204	
Flammability Rating _____	UL94
FMVSS-302 Approved	
Recommended Cutting _____	Hot Knife
Colors _____	<30
Wall Thickness _____	.025
Tensile Strength (Yarn) _____	7.5
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.38
Moisture Absorption _____	.1-.2
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	.19
CVCM _____	.00
WVR _____	.16
Smoke D-Max _____	56
ASTM E-662	
Outgassing _____	Med
Oxygen Index _____	21
ASTM D-2863	

© 2016 Techflex, Inc. - Any unauthorized reproduction, in whole or part, in any medium whatsoever, without the express written permission of Techflex, Inc. is strictly forbidden.


Techflex product names and logos are registered trademarks of Techflex, Inc., unless otherwise attributed. The contents and illustrations contained herein are believed to be reliable. Techflex makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Techflex's only obligations are those in standard terms of sale for these products and Techflex will not be liable for any consequential or other damages arising due to misuse of these products or typographical errors or omissions. Users should make their own evaluation to determine the suitability of these products for their unique and specific applications.




GENERAL PURPOSE
Technical Data Sheet




WH White



CF Checkered Flag




PG Platinum Gray




SK Snake




BR Brown




AQ Aqua




RD Red



OR Orange




YL Yellow




GN Green




BL Blue




PP Purple




CL Clear




BK Black




CB Carbon




BE Beige



GY Gray




DP Dark Purple




* NR Neon Red




* NP Neon Pink




* NY Neon Yellow




* NG Neon Green




* NB Neon Blue




* NO Neon Orange



PT Patriot




* NX Nitrox




* JS Jester





* OG Ogre



* SH Super Hero



SS Safety Stripe

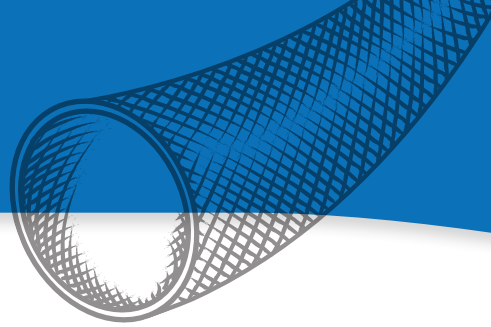


RE Reggae




FG Forest Green

■ Custom combination colors manufactured by Techflex


■ The possibilities are endless!




CC Candy Cane




AL Alien




MO Monochrome



GW Gray White



DS Desert



RS Red Spiral




UG Uptown Green



UY Uptown Yellow




UR Uptown Red




UP Uptown Purple



UB Uptown Blue




UX Uptown Gold




CO Coral




HH Hip Hop




SB Sherbert




TL Twilight




RW Rainbow




HO Holiday




BB Black Beige




GD Ground Wire




SM Shimmer



CK Corn Kernel



RC Rainbow Clear



RB Rainbow Black