


Economy Series Fiber Optic Pigtails and Pigtail Kits

APPLICATION

Leviton single-mode and multimode Economy Series Pigtails are designed to support both fusion and mechanical splicing for fiber cabling systems. The pigtails are available separately or in kits for ease of installation and ordering.

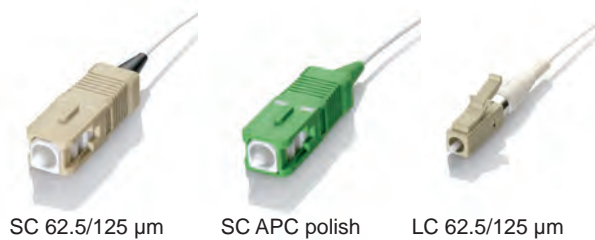

SPECIFICATION

Single-mode and multimode fiber optic pigtails shall be available in three-meter lengths, made of OFNR fiber optic cable, and be compliant with ANSI/TIA-568-C.3 and ANSI/TIA-598-C. Single-mode pigtails shall come in ST, SC, and LC connector styles, and offer UPC and APC polish types. Multimode pigtails shall come in ST, SC, and LC connector styles, and offer OM1, OM2, OM3, and OM4 core styles.

FEATURES

- Available in SC, ST, and LC connectors
- All assemblies are 100% optically tested
- All pigtails are serialized for traceability
- Support equipment for complete network solutions
- Pigtails in kit are individually colored to easily match color-coded (900 µm or 250 µm) fiber cable that will be spliced
- Quick-turn service for fast delivery

DESIGN CONSIDERATIONS

- Easy-strip 900 µm buffered fiber
- Fiber available: OM1, OM2, OM3, OM4, and OS2
- Splice sleeves, holders, and trays available from Leviton
- 12-fiber color-coded pigtail kits per ANSI/TIA-598-C

STANDARDS COMPLIANCE

GR 1435; General Requirements for Multi-Fiber Optical Connectors ANSI/TIA-568-C.3; Optical Fiber Cabling Components Standard Kits are color compliant per ANSI/TIA-598-C.

PHYSICAL SPECIFICATIONS

Dimensions: Three meters long
 Materials: 900 µm buffered fiber
 Colors (kit): Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Purple, Rose, and Aqua

COUNTRY OF ORIGIN

China

WARRANTY INFORMATION

For a copy of Leviton product warranties, visit www.leviton.com/warranty.

PERFORMANCE SPECIFICATIONS		
	Multimode	Single-mode
Insertion Loss	0.35 dB Max	0.25 dB Max
Return Loss	>-25 dB	>-55 dB (UPC), >-60 dB (APC)
Durability	500 Matings	500 Matings
Repeatability	<0.2 dB	<0.2 dB
Operating Environment	-40° C to 75° C	-40° C to 75° C
Rohs	Yes	Yes

PRODUCT SPECIFICATIONS
62PXX-XXX, UPPXX-XXX, 50PXX-XXX, APPXX-SXX
5LPXX-XXX, 54PLC-XXX



ELECTRONIC FILES


For CAD files, typical specs, or technical drawings (.DXF, .DWG), visit www.leviton.com.

MULTIMODE PIGTAIL - SIMPLEX (3 METERS)	
Description	Part No.
SC 62.5/125 µm, OM1	62PSC-M03
ST 62.5/125 µm, OM1	62PST-M03
LC 62.5/125 µm, OM1	62PLC-M03
SC 50/125 µm, OM2	50PSC-M03
ST 50/125 µm, OM2	50PST-M03
LC 50/125 µm, OM2	50PLC-M03
SC 50/125 µm, LOMM, OM3	5LP5C-M03
ST 50/125 µm, LOMM, OM3	5LPST-M03
LC 50/125 µm, LOMM, OM3	5LPLC-M03
LC 50/125 µm, LOMM, OM4	54PLC-M03

SINGLE-MODE PIGTAIL - SIMPLEX (3 METERS)	
Description	Part No.
SC UPC polish	UPPSC-S03
ST UPC polish	UPPST-S03
LC UPC polish	UPPLC-S03
SC APC polish	APPSC-S03
LC APC polish	APPLC-S03

12-FIBER INDIVIDUAL COLOR-CODED PIGTAIL KITS (3 METERS)	
Description	Part No.
SC 62.5/125 µm, OM1	62PSC-KIT
SC 50/125 µm, OM2	50PSC-KIT
SC 50/125 µm, LOMM, OM3	5LPSC-KIT
LC 62.5/125 µm, OM1	62PLC-KIT
LC 50/125 µm, OM2	50PLC-KIT
LC 50/125 µm, LOMM, OM3	5LPLC-KIT
ST 62.5/125 µm, OM1	62PST-KIT
ST 50/125 µm, OM2	50PST-KIT
SC UPC Polish SM, OS2	UPPSC-KIT
LC UPC Polish SM, OS2	UPPLC-KIT
LC 50/125 µm, LOMM, OM4	54PLC-KIT

Note: For other configurations please contact Inside Sales at 800.722.2082 to order.
 Callers from outside the U.S. and Canada please dial 1.425.486.2222.

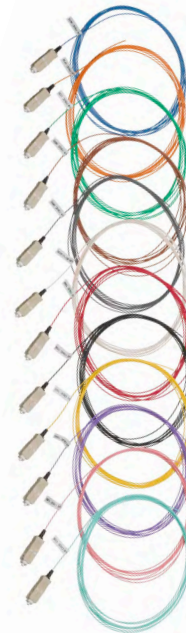

62PXX-XXX, UPPXX-XXX, 50PXX-XXX, APPXX-SXX, 5LPXX-XXX, 54PLC-XXX



Leviton Network Solutions
 2222 - 222nd St. SE
 Bothell, WA 98021-4416

Asia / Pacific
 T +1.631.812.6228
 E infoasean@leviton.com

Canada
 T +1.514.954.1840
 E pcservice@leviton.com

Caribbean
 T +1.954.593.1896
 E infocaribbean@leviton.com

China
 T +852.2774.9876
 E infochina@leviton.com

Colombia
 T +57.1.743.6045
 E infocolombia@leviton.com

tel 1-800-824-3005
 tel +1-425-486-2222
 appeng@leviton.com
 www.leviton.com

Europe
 T +33.6.8869.1380
 E infoeurope@leviton.com

India / SAARC
 T +971.4.886.4722
 E infoindia@leviton.com

Mexico
 T +52.55.5082.1040
 E lsamarketing@leviton.com

Middle East & Africa
 T +971.4.886.4722
 E lmeinfo@leviton.com

South Korea
 T +82.2.3273.9963
 E infokorea@leviton.com