


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

CATALOG NUMBER	STRANDED COPPER CONDUCTOR SIZE (AWG)		NO. RIBS	DIMENSIONS - IN (mm)				COLOR CODE	WIRE STRIP LENGTH	INSTALLATION TOOLING PANDUIT DIE PART NO. DIE SET COLOR & INDEX NO. NO. OF CRIMPS ( )	
	RUN	TAP		A	Q	T (MATL THICKNESS)	V			CT-2001	CT-1700**
CTAPF10-16-C	14	16-14	0	.41	.13	.06	.19	RED	1/2	CD-2001-8 RED P21	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*
	12	16-12		[10.4]	[3.3]	[1.5]	[4.8]		(2)		
	10	14									
CTAPF8-12-C	10	10	0	.67	.19	.07	.26	BLUE	11/16	CD-2001-6 BLUE P24	
	8	12		[17.0]	[4.8]	[1.8]	[6.6]		(2)		
	6	12-10									
CTAPF6-12-C	8	10-8	0	.67	.24	.07	.32	GRAY	11/16	CD-2001-4 GRAY P29	
	6	12-10		[17.0]	[6.1]	[1.8]	[8.1]		(2)		
	4	12-8									
CTAPF4-12-C	6	8-6	1	1.25	.28	.07	.40	BROWN	1-5/16	CD-2001-2 BROWN P33	CDM-920-2 BROWN P33M
	5,4	12-8		[31.8]	[7.1]	[1.8]	[10.2]		(4)		
	3	12-6									
CTAPF3-12-C	5,4	6-5	1	1.25	.31	.08	.46	GREEN	1-5/16	CD-2001-1 GREEN P37	CDM-920-1 GREEN P37M
	3	12-6		[31.8]	[7.9]	[2.0]	[11.7]		(4)		
	2	12-6									
CTAPF2-12-C	4	4	1	1.25	.33	.08	.51	PINK	1-5/16	CD-2001-1/0 PINK P42	CDM-920-1/0 PINK P42M
	3	5		[31.8]	[8.4]	[2.0]	[13.0]		(2)		
	2	12-6									
CTAPF1-12-C	3	4-3	2	1.82	.40	.08	.57	BLACK	1-7/8	CD-2001-2/0 BLACK P45	CDM-920-2/0 BLACK P45M
	2	5-4		[46.2]	[10.2]	[2.0]	[14.5]		(3)		
	1	12-5									
CTAPF1/0-12-L	2	4-2	2	1.82	.42	.09	.63	ORANGE	1-7/8	CD-2001-3/0 ORANGE P50	CDM-920-3/0 ORANGE P50M
	1	4-3		[46.2]	[10.7]	[2.3]	[16.0]		(3)		
	1/0	12-4									
CTAPF2/0-12-Q	1	2-1	2	1.82	.48	.09	.71	PURPLE	1-7/8	CD-2001-4/0 PURPLE P54	CDM-920-4/0 PURPLE P54M
	1/0	3-2		[46.2]	[12.2]	[2.3]	[18.0]		(3)		
	2/0	12-3									
CTAPF3/0-12-Q	1/0	1-1/0	2	1.82	.55	.09	.81	YELLOW	1-7/8	CD-2001-250 YELLOW P62	CDM-920-250 YELLOW P62M
	2/0	2-1		[46.2]	[14.0]	[2.3]	[20.6]		(3)		
	3/0	12-2									

\*CT-940CH AND CT-2940 REQUIRE CD-940-DA ADAPTER FOR CDM-920DIES  
\*\*CT-1700 CRIMP DIE POCKETS ARE INTEGRATED INTO THE TOOL HEAD

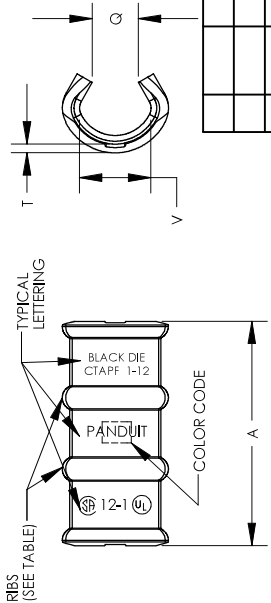

NOTES:

- MATERIAL: COPPER
- UL LISTED AND CSA CERTIFIED FOR APPLICATIONS UP TO 600 VOLTS. TEMPERATURE RATING 90 °C
- PACKAGE QTY:  
-L = 50  
-C = 100  
-Q = 25

**PANDUIT CORP. TINLEY PARK, ILLINOIS**  
NON-INSULATED THIN-WALL C-TAP CONNECTORS  
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:  
(.X) ± .01  
(.XX) ± .005  
(.XXX) ± .0025  
ANGLES ± .1°  
SCALE NONE  
DRAWING NO / CAD FILE C41172\_05  
DWG SIZE B

REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST'CH'D
05	11/09	JHNJU	JHNJU	CONVERTED DWG TO SOLIDWORKS		
04	10/02	SAB		REMOVED T&B TOOL INFORMATION & ADDED 2 COLUMNS OF PANDUIT TOOL INFORMATION		
03	6/02	SAB	JAC	REMOVED CT-740 & CT-2001 TOOL COLUMN & ADDED T&B COLUMN		
02	9/01	SAB	RJS	REVISED & REDRAWN, ADDED CTAPF10-I-6-C		
01	9/97	TIM	WJB	REVISED RIBS		

SEE NOTES

DRAWN BY  
DATE