


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

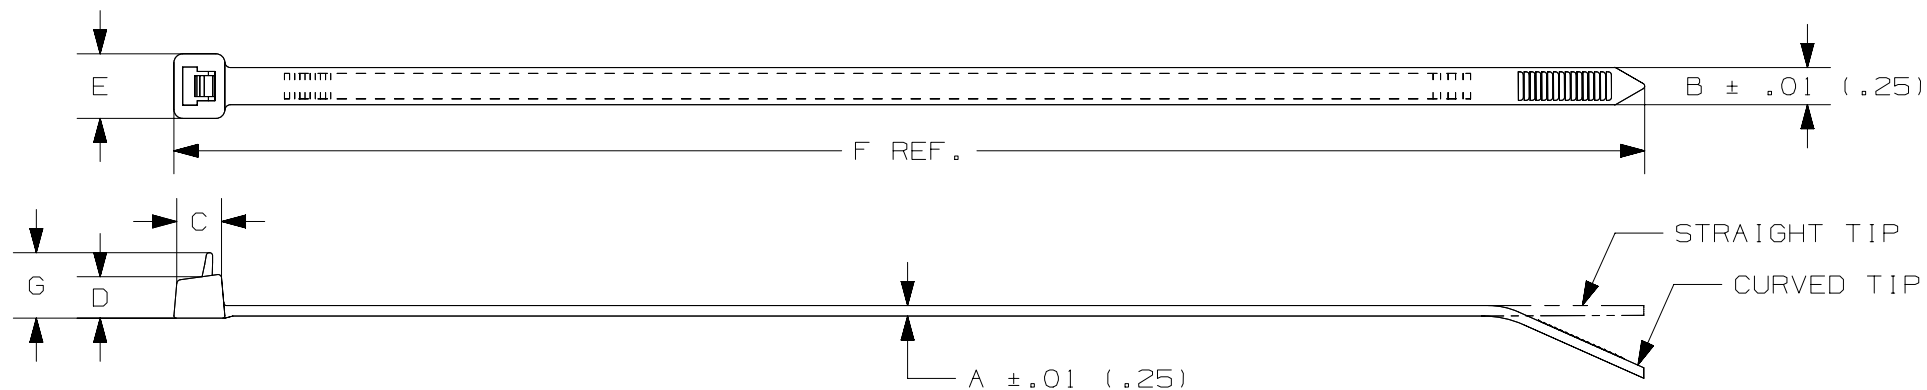


| PANDUIT *<br>PART NO. | BUNDLE DIA.       |                   | A<br>in.<br>(mm) | B<br>in.<br>(mm) | C<br>in.<br>(mm) | D<br>in.<br>(mm) | E<br>in.<br>(mm) | F<br>in.<br>(mm) | G<br>in.<br>(mm) | MIN. LOOP<br>TENSILE lbs<br>(N) | CROSS-<br>SECTION | TIP<br>STYLE | WEIGHT<br>lbs/100pcs<br>(g) |
|-----------------------|-------------------|-------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|---------------------------------|-------------------|--------------|-----------------------------|
|                       | MIN<br>in<br>(mm) | MAX<br>in<br>(mm) |                  |                  |                  |                  |                  |                  |                  |                                 |                   |              |                             |
| PRT1S                 | .06<br>(1.5)      | 1.00<br>(25)      | .052<br>(1.3)    | .190<br>(4.8)    | .258<br>(6.5)    | .219<br>(5.6)    | .316<br>(8.0)    | 4.8<br>(122)     | .318<br>(8.1)    | 50<br>(222)                     | STANDARD          | CURVED       | .13<br>(59)                 |
| PRT1.5S               | .06<br>(1.5)      | 1.50<br>(38)      | .052<br>(1.3)    | .190<br>(4.8)    | .258<br>(6.5)    | .219<br>(5.6)    | .316<br>(8.0)    | 6.3<br>(160)     | .318<br>(8.1)    | 50<br>(222)                     | STANDARD          | CURVED       | .26<br>(119)                |
| PRT2S                 | .06<br>(1.5)      | 1.88<br>(48)      | .052<br>(1.3)    | .190<br>(4.8)    | .258<br>(6.5)    | .219<br>(5.6)    | .316<br>(8.0)    | 7.4<br>(188)     | .318<br>(8.1)    | 50<br>(222)                     | STANDARD          | CURVED       | .29<br>(132)                |
| PRT3S                 | .06<br>(1.5)      | 3.00<br>(76)      | .052<br>(1.3)    | .190<br>(4.8)    | .265<br>(6.7)    | .219<br>(5.6)    | .337<br>(8.6)    | 11.5<br>(292)    | .318<br>(8.1)    | 50<br>(222)                     | STANDARD          | CURVED       | .45<br>(205)                |
| PRT4S                 | .06<br>(1.5)      | 4.00<br>(102)     | .052<br>(1.3)    | .190<br>(4.8)    | .265<br>(6.7)    | .219<br>(5.6)    | .337<br>(8.6)    | 14.5<br>(368)    | .318<br>(8.1)    | 50<br>(222)                     | STANDARD          | CURVED       | .56<br>(255)                |

\* SEE [www.panduit.com](http://www.panduit.com) FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

|     |          |     |     |      |                                        |                                                                      |          |                                         |     |
|-----|----------|-----|-----|------|----------------------------------------|----------------------------------------------------------------------|----------|-----------------------------------------|-----|
|     |          |     |     |      |                                        | TITLE                                                                |          | PAN-TY CABLE TIES<br>RELEASEABLE SERIES |     |
|     |          |     |     |      |                                        | CUSTOMER DRAWING                                                     |          |                                         |     |
|     |          |     |     |      |                                        | ITEM REVISION NAME                                                   |          | 10B0150P/00                             |     |
|     |          |     |     |      |                                        | DATASET FILE NAME                                                    |          | 10B0150P_DC_PRT/00A                     |     |
|     |          |     |     |      |                                        | UNLESS OTHERWISE SPECIFIED,<br>DIMENSIONAL TOLERANCES ARE: IN [ mm ] |          | MATERIAL:                               |     |
|     |          |     |     |      |                                        | .X ± .XX ± .02 [ .5 ]                                                |          | NYLON 6.6                               |     |
|     |          |     |     |      |                                        | .XXX ± .020 [ .51 ]                                                  |          | DRAWING NUMBER:                         |     |
|     |          |     |     |      |                                        | ANGLES ±                                                             |          | SS - 4472                               |     |
|     |          |     |     |      |                                        | THIRD ANGLE<br>PROJECTION                                            |          |                                         |     |
| 14  | 11.17.14 | BDK | MPH | JADE | UPDATED TITLE BORDER AND UPDATED NOTES | SS-4472                                                              | DRAWN BY | DATE                                    | CHK |
| REV | DATE     | BY  | CHK | APR  | DESCRIPTION                            | ECN                                                                  | CEW      | 7-31-85                                 | HVP |
|     |          |     |     |      |                                        | SCALE                                                                |          | NONE                                    |     |
|     |          |     |     |      |                                        | SHT 1 OF 2                                                           |          | A                                       |     |

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

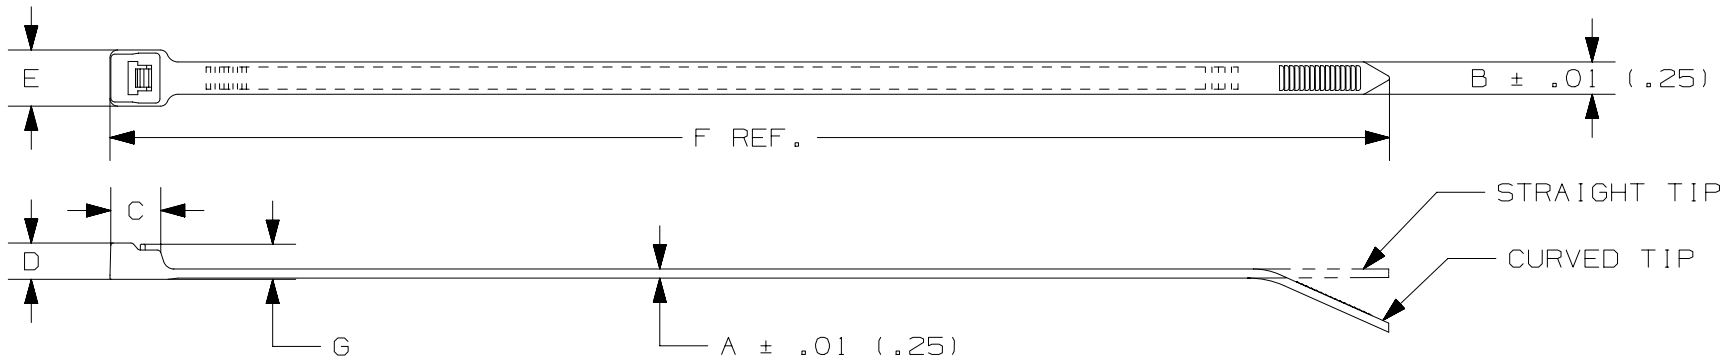

| PANDUIT *<br>PART NO. | BUNDLE DIA.       |                   | A<br>in.<br>(mm) | B<br>in.<br>(mm) | C<br>in.<br>(mm) | D<br>in.<br>(mm) | E<br>in.<br>(mm) | F<br>in.<br>(mm) | G<br>in.<br>(mm) | MIN. LOOP<br>TENSILE lbs<br>(N) | CROSS-<br>SECTION | TIP<br>STYLE | WEIGHT<br>lbs/100pcs<br>(g) |
|-----------------------|-------------------|-------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|---------------------------------|-------------------|--------------|-----------------------------|
|                       | MIN<br>in<br>(mm) | MAX<br>in<br>(mm) |                  |                  |                  |                  |                  |                  |                  |                                 |                   |              |                             |
| PRT2H                 | .188<br>(4.8)     | 2.00<br>(51)      | .075<br>(1.9)    | .300<br>(7.6)    | .413<br>(10.5)   | .300<br>(7.6)    | .480<br>(12.2)   | 8.4<br>(213)     | .430<br>(10.9)   | 80<br>(356)                     | HEAVY             | STRAIGHT     | .76<br>(346)                |
| PRT3H                 | .188<br>(4.8)     | 3.00<br>(76)      | .075<br>(1.9)    | .300<br>(7.6)    | .413<br>(10.5)   | .300<br>(7.6)    | .480<br>(12.2)   | 11.4<br>(290)    | .430<br>(10.9)   | 80<br>(356)                     | HEAVY             | STRAIGHT     | 1.04<br>(473)               |
| PRT4H                 | .188<br>(4.8)     | 4.00<br>(102)     | .075<br>(1.9)    | .300<br>(7.6)    | .413<br>(10.5)   | .300<br>(7.6)    | .480<br>(12.2)   | 14.5<br>(368)    | .430<br>(10.9)   | 80<br>(356)                     | HEAVY             | STRAIGHT     | 1.28<br>(581)               |

\* SEE [www.panduit.com](http://www.panduit.com) FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

|     |          |     |     |      |                                        |                                                                                                                                                            |                 |
|-----|----------|-----|-----|------|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
|     |          |     |     |      |                                        | TITLE<br><b>PAN-TY CABLE TIES<br/>RELEASES SERIES</b><br>CUSTOMER DRAWING                                                                                  |                 |
|     |          |     |     |      |                                        | ITEM REVISION NAME<br><b>10B0150P/00</b>                                                                                                                   |                 |
|     |          |     |     |      |                                        | DATASET FILE NAME<br><b>10B0150P_DC_PRT/00A</b>                                                                                                            |                 |
|     |          |     |     |      |                                        | UNLESS OTHERWISE SPECIFIED,<br>DIMENSIONAL TOLERANCES ARE: IN [ mm ]<br>.X ± .XX ± .02 [ .5 ] .XXX ± .020 [ .51 ]<br>ANGLES ±<br>THIRD ANGLE<br>PROJECTION |                 |
|     |          |     |     |      |                                        | MATERIAL:<br><b>NYLON 6.6</b>                                                                                                                              |                 |
|     |          |     |     |      |                                        | DRAWING NUMBER:<br><b>SS - 4472</b>                                                                                                                        |                 |
| 14  | 11.17.14 | BDK | MPH | JADE | UPDATED TITLE BORDER AND UPDATED NOTES | SS-4472                                                                                                                                                    |                 |
| REV | DATE     | BY  | CHK | APR  | DESCRIPTION                            | ECN                                                                                                                                                        | DRAWN BY<br>CEW |
|     |          |     |     |      |                                        |                                                                                                                                                            | DATE<br>7-31-85 |
|     |          |     |     |      |                                        |                                                                                                                                                            | CHK<br>HVP      |
|     |          |     |     |      |                                        |                                                                                                                                                            | SCALE<br>NONE   |
|     |          |     |     |      |                                        |                                                                                                                                                            | SHT 2 OF 2      |
|     |          |     |     |      |                                        |                                                                                                                                                            | SIZE<br>A       |