

DESCRIPTION

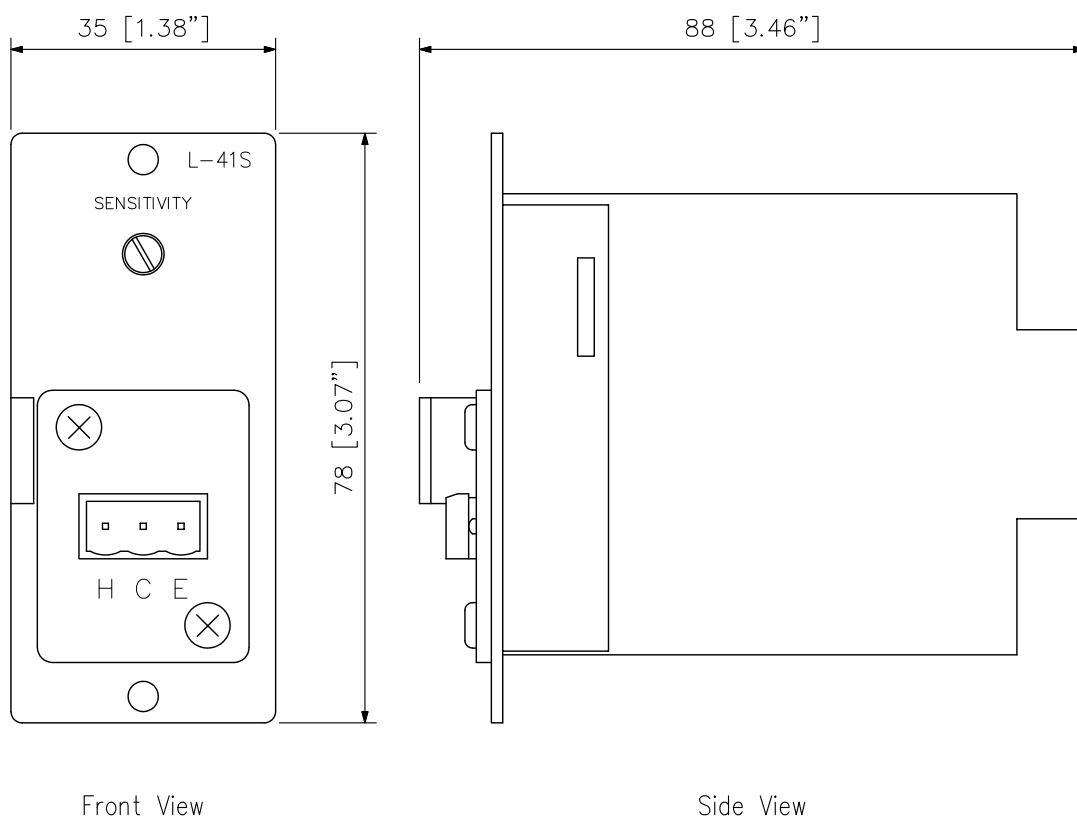
The L-41S is a line input module to be used in conjunction with the 900 series components and other TOA's equipment.

It has a transformer balanced line matching input with removable terminal block connector, and mute-send function.

SPECIFICATIONS

* 0 dB=1 V

Power Source	24 V DC (supplied from the main frame)
Current Consumption	9 mA
Input Sensitivity	-18 dB* (Rated output: -20 dB*)
Input Impedance	600 Ω , balanced transformer-isolated
Frequency Response	20 Hz - 20 kHz ± 1.5 dB
Signal Activating Mute Sensitivity	-42 to -36 dB*
Connector	Removable terminal block (3P)
Dimensions	35 (W) $\times$ 78 (H) $\times$ 88 (D) mm (1.38" $\times$ 3.07" $\times$ 3.46")
Weight	Max. 85 g (0.19 lb)

APPEARANCE


UNIT:mm SCALE:1/1