


Category 6A U/FTP (STP)

CMR/CMP

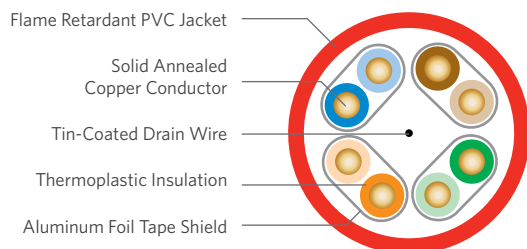

SPECIFICATIONS

Configuration	Copper pairs each surrounded by aluminum/Mylar foil with center drain wire and jacket
Pair Count	4
Conductor	Solid annealed copper
AWG (mm)	23 (0.57)
Insulation	CMR: Polyolefin CMP: FEP
Insulation Colors	Pair 1: ColorTip Light Blue, Blue Pair 2: ColorTip Light Orange, Orange Pair 3: ColorTip Light Green, Green Pair 4: ColorTip Light Brown, Brown
Drain Wire	Tinned copper
Jacket	CMR: Flame retardant (FR) PVC CMP: FR, low smoke PVC
Characteristic Impedance Ohms	100 ± 15
Nominal Velocity of Propagation %	CMR: 73 CMP: 77
Performance Compliance	UL 444 CSA C22.2 No. 214-08 UL 1666 NFPA 262 ANSI/TIA-568-C.2 Article 800, NEC (NFPA 70)
NRTL Programs	UL, c(UL) or ETL, c(ETL) Listed CMR UL, c(UL) or ETL, c(ETL) Listed CMP
Sustainability	UL Certified EPD HPD Multi-Attribute Certification USGBC® Member RoHS-compliant/RoHS 2-compliant REACH-compliant

PRODUCT DESCRIPTION



FIRST MANUFACTURER IN THE INDUSTRY
to offer products that contribute toward LEED!

Superior Essex offers Shielded Twisted Pair Category 6A cables in both plenum and riser versions. The cable has guaranteed performance to 600 MHz and meets or exceeds ANSI/TIA-568-C.2 for CAT 6A cables required for 10GBASE-T applications. The cable consists of four (4) balanced 23 AWG copper pairs. Each pair is wrapped with a Mylar® backed aluminum foil with the drain wire in the center of all 4 copper pairs. The wrapped pairs are then jacketed with an appropriate flexible PVC jacket for either plenum or riser applications.

APPLICATIONS

- 10BASE-T through 10GBASE-T Ethernet
- Power over Ethernet (PoE) - IEEE 802.3bt Type 1 to 4
- ATM and token ring
- Backward compatible to legacy protocols and applications

FEATURES

- UL Certified Environmental Product Declaration (EPD)
- Health Product Declaration™ (HPD™)
- Multi-Attribute Certification by GreenCircle Certified, LLC
- Individually foil shielded pairs
- Exceeds specification ANSI/TIA-568-C.2 for CAT 6A cable performance
- Riser and plenum rated designs
- QuickCount® marking system in feet and meters
- ColorTip® circuit identification system

BENEFITS

- Contributes toward 1 LEED point under the Material and Resources credit (MRc)
- Contributes toward 1 LEED point under the MRc
- Offers an overview of the sustainability of a product, its packaging and manufacturing
- Protects against EMI/RFI and provides exceptional NEXT, PSNEXT, ELFEXT, and electrical performance
- Meets 10GBASE-T application requirements for both Insertion Loss and Return Loss and exceeds requirements for alien and internal crosstalk performance
- UL 1666 and NFPA 262 fire rating options help to reduce additional expensive materials required to meet building safety codes
- Provides remaining length of cable on reel
- Easily identifiable conductor mates even in low-light environments

PART NUMBERS AND PHYSICAL CHARACTERISTICS

Listing	Part Number ¹	Nominal Diameter in (mm)	Approx. Weight lbs/kft (kg/km)	Package	Packages per Pallet
CMR	6S-220-xA	0.32 (8.1)	44 (66)	1,000' Plywood reel	12
CMP	6S-220-xB	0.32 (8.1)	51 (76)	1,000' Plywood reel	12

JACKET COLORS

¹Replace "x" with:

Blue = 2

Gray = 3

White = 4

Green = 5

Yellow = 6

Red = 9

Orange = D

Black = E

ELECTRICAL SPECIFICATIONS

Frequency MHz	Insertion Loss @ 20°C Maximum dB/100 m			NEXT Minimum dB/100 m			ACR Minimum dB/100 m			PSNEXT Minimum dB/100 m			PSACR Minimum dB/100 m		
	TIA-568-C.2		Superior Essex	TIA-568-C.2		Superior Essex	TIA-568-C.2		Superior Essex	TIA-568-C.2		Superior Essex	TIA-568-C.2		Superior Essex
	Specified	Guar.	Typical	Specified	Guar.	Typical	Calculated	Guar.	Typical	Specified	Guar.	Typical	Calculated	Guar.	Typical
1	2.1	2.1	2.0	74.3	82.3	84.8	72.2	80.2	82.8	72.3	80.3	82.8	70.2	78.2	80.8
4	3.8	3.8	3.7	65.3	73.3	75.8	61.5	69.5	72.1	63.3	71.3	73.8	59.5	67.5	70.1
8	5.3	5.3	5.2	60.8	68.8	71.3	55.5	63.5	66.1	58.8	66.8	69.3	53.5	61.5	64.1
10	5.9	5.9	5.8	59.3	67.3	69.8	53.4	61.4	64.0	57.3	65.3	67.8	51.4	59.4	62.0
16	7.5	7.5	7.3	56.2	64.2	66.7	48.7	56.7	59.4	54.2	62.2	64.7	46.7	54.7	57.4
20	8.4	8.4	8.2	54.8	62.8	65.3	46.4	54.4	57.1	52.8	60.8	63.3	44.4	52.4	55.1
25	9.4	9.4	9.2	53.3	61.3	63.8	43.9	51.9	54.6	51.3	59.3	61.8	41.9	49.9	52.6
31.25	10.5	10.5	10.3	51.9	59.9	62.4	41.4	49.4	52.1	49.9	57.9	60.4	39.4	47.4	50.1
62.5	15.0	15.0	14.7	47.4	55.4	57.9	32.4	40.4	43.2	45.4	53.4	55.9	30.4	38.4	41.2
100	19.1	19.1	18.8	44.3	52.3	54.8	25.2	33.2	36.0	42.3	50.3	52.8	23.2	31.2	34
200	27.6	27.6	27.0	39.8	47.8	50.3	12.2	20.2	23.3	37.8	45.8	48.3	10.2	18.2	21.3
250	31.1	31.1	30.4	38.3	46.3	48.8	7.2	15.2	18.4	36.3	44.3	46.8	5.2	13.2	16.4
300	34.3	34.3	33.6	37.1	45.1	47.6	2.8	10.8	14.0	35.1	43.1	45.6	0.8	8.8	12.0
350	37.2	37.2	36.5	36.1	44.1	46.6		6.9	10.1	34.1	42.1	44.6		4.9	8.1
400	40.1	40.1	39.3	35.3	43.3	45.8		3.2	6.5	33.3	41.3	43.8		1.2	4.5
500	45.3	45.3	44.4	33.8	41.8	44.3				31.8	39.8	42.3			
600		50.1	49.5		40.6	43.1					38.6	41.1			

Frequency MHz	Return Loss Minimum dB/100 m			ACRF Minimum dB/100 m			PSACRF Minimum dB/100 m			PSANEXT Minimum dB/100 m			PSAACRF Minimum dB/100 m		
	TIA-568-C.2		Superior Essex	TIA-568-C.2		Superior Essex	TIA-568-C.2		Superior Essex	TIA-568-C.2		Superior Essex	TIA-568-C.2		Superior Essex
	Specified	Guar.	Typical	Specified	Guar.	Typical	Specified	Guar.	Typical	Specified	Guar.	Typical	Specified	Guar.	Typical
1	20.0	20.0	20.6	67.8	69.8	73.8	64.8	66.8	70.8	67.0	70.0	72.0	67.0	70.0	72.0
4	23.0	23.0	23.7	55.8	57.8	61.8	52.8	54.8	58.8	67.0	70.0	72.0	66.2	69.2	71.2
8	24.5	24.5	25.3	49.7	51.7	55.7	46.7	48.7	52.7	67.0	70.0	72.0	60.1	63.1	65.1
10	25.0	25.0	25.8	47.8	49.8	53.8	44.8	46.8	50.8	67.0	70.0	72.0	58.2	61.2	63.2
16	25.0	25.0	25.8	43.7	45.7	49.7	40.7	42.7	46.7	67.0	70.0	72.0	54.1	57.1	59.1
20	25.0	25.0	25.8	41.8	43.8	47.8	38.8	40.8	44.8	67.0	70.0	72.0	52.2	55.2	57.2
25	24.3	24.3	25.1	39.8	41.8	45.8	36.8	38.8	42.8	67.0	70.0	72.0	50.2	53.2	55.2
31.25	23.6	23.6	24.3	37.9	39.9	43.9	34.9	36.9	40.9	67.0	70.0	72.0	48.3	51.3	53.3
62.5	21.5	21.5	22.2	31.9	33.9	37.9	28.9	30.9	34.9	65.6	68.6	70.6	42.3	45.3	47.3
100	20.1	20.1	20.7	27.8	29.8	33.8	24.8	26.8	30.8	62.5	65.5	67.5	38.2	41.2	43.2
200	18.0	18.0	18.5	21.8	23.8	27.8	18.8	20.8	24.8	58.0	61.0	63.0	32.2	35.2	37.2
250	17.3	17.3	17.8	19.8	21.8	25.8	16.8	18.8	22.8	56.5	59.5	61.5	30.2	33.2	35.2
300	16.8	16.8	17.3	18.3	20.3	24.3	15.3	17.3	21.3	55.3	58.3	60.3	28.7	31.7	33.7
350	16.3	16.3	16.8	16.9	18.9	22.9	13.9	15.9	19.9	54.3	57.3	59.3	27.3	30.3	32.3
400	15.9	15.9	16.4	15.8	17.8	21.8	12.8	14.8	18.8	53.5	56.5	58.5	26.2	29.2	31.2
500	15.2	15.2	15.7	13.8	15.8	19.8	10.8	12.8	16.8	52.0	55.0	57.0	24.2	27.2	29.2
600			15.1		14.2	18.2		11.2	15.2			55.1			28.6

SUSTAINABILITY LEADERSHIP



UL and the related logo are registered trademarks of UL LLC. Health Product Declaration, HPD and the related logo are trademarks of Health Product Declaration Collaborative. GreenCircle Certified logo is a registered trademark of GreenCircle Certified, LLC. USGBC and the related logo are registered trademarks of U.S. Green Building Council. Mylar is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.