

# MiniXtend® Cable with Binderless\* FastAccess® Technology 96 F, SMF-28® Ultra fiber, Single-mode (G.652.D/G.657.A1)

CORNING

## Part Number: 096ZM4-T4F22A20


Corning MiniXtend® Cable with Binderless\* FastAccess® Technology is an all-dielectric loose tube cable designed for microduct applications and features industry-leading fiber density.

The innovative Binderless FastAccess Technology improves cable handling and reduces access time up to 70 percent while lowering risk of cable and fiber damage.

The MiniXtend Cable design reduces the cable diameter by up to 50 percent (versus traditional loose tube cables) which improves fiber density for duct applications and also enables new applications which can reduce total install cost by up to 60 percent.

This cable also features Corning SMF-28® Ultra single-mode fiber which combines industry-leading attenuation and improved macrobend performance in one fiber. SMF-28 Ultra fiber is ITU-T Recommendation G.652.D compliant and also exceeds the requirements of the ITU-T Recommendation G.657.A1 standard.

\* Corning's patented Binderless\* FastAccess® Technology refers to the combination of a Corning FastAccess Technology jacket with an innovative technology used to bind cable construction through the manufacturing process, eliminating the use of binder yarns and waterblocking tapes.

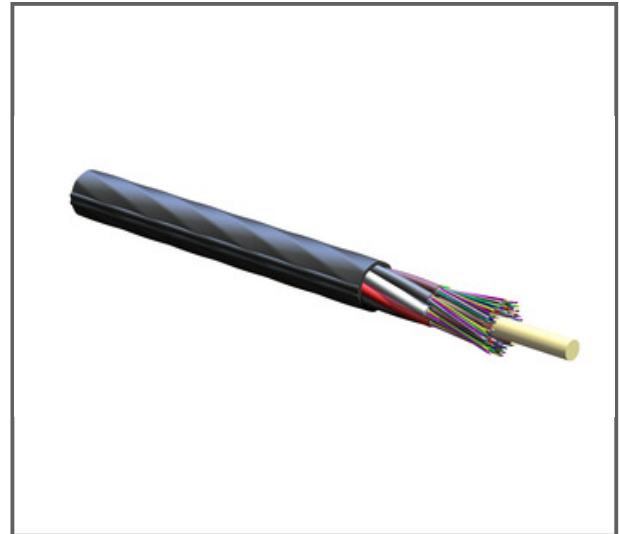

## Features and Benefits

### **Binderless\* FastAccess® Technology**

Innovative cable design that reduces cable access time up to 70 percent and lowers the risk of inadvertent fiber damage

### **Improved cable and fiber density**

Small cable OD enables higher density and lower deployment cost; up to 96 fibers in 8 mm ID duct and up to 144 fibers in 10 mm ID duct

### **Optimized for air-assisted install in microducts**

Capable of installation distances greater than 2000 m (6560 ft) at speeds up to 150 m/min (490 ft/min)

### **Mid-span express buffer tube performance**

Meets the Telcordia GR-20 and RDUP/RUS PE-90 requirements for mid-span express buffer tube storage

### **SMF-28® Ultra fiber**

ITU-T G.652.D/G.657.A1 rated fiber with improved attenuation and bend performance as well as compatibility with standard single-mode fibers

### **Fully waterblocked loose tube, gel-filled design**

Meets industry standard waterblocking requirements for outdoor cable

# MiniXtend® Cable with Binderless\* FastAccess® Technology 96 F, SMF-28® Ultra fiber, Single-mode (G.652.D/G.657.A1)

CORNING

## Specifications

### Mechanical Specifications

Max. Tensile Strength, Short-Term	1334 N
Min. Bend Radius Installation	126 mm (4.96 in)
Min. Bend Radius Operation	95 mm (3.74 in)
Nominal Outer Diameter	6.3 mm (0.25 in )

### Cable Design

Central Element	Dielectric
Fiber Count	96
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate, White, Red, Black
Outer Jacket Color	Black
Outer Jacket Material	Polyethylene (PE)
Buffer Tube Color	Blue, Orange, Green, Brown, Slate, White, Red, Black
Buffer Tube Diameter	1.4 mm (0.06 in)
Number of Active Tubes	8
Number of Tube Positions	8
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12

### Environmental Conditions

Temperature Range, Installation	-15 °C - 60 °C (5 °F - 140 °F)
Temperature Range, Storage	-40 °C - 70 °C (-40 °F - 158 °F)

# MiniXtend® Cable with Binderless\* FastAccess® Technology 96 F, SMF-28® Ultra fiber, Single-mode (G.652.D/G.657.A1)

CORNING

## Environmental Conditions

Temperature Range, Operation	-40 °C - 70 °C (-40 °F - 158 °F)
------------------------------	----------------------------------

## General Specifications

Environment	Outdoor
Cable Type	Stranded Loose Tube Micro Cable
Product Type	Dielectric
Fiber Category	SMF-28® Ultra fiber
Application	Microduct

## Ordering Information

Weight	36 kg/km
--------	----------

## Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Common Installations	Outdoor microduct, indoor when installed according to National Electrical Code® (NEC®) Article 770
Design and Test Criteria	IEC 60794-5-10
Corning Recommendations	This cable should be placed in microduct for all applications, including aerial.

## Optical Characteristics

Fiber Code	Z
------------	---

# MiniXtend® Cable with Binderless\* FastAccess® Technology 96 F, SMF-28® Ultra fiber, Single-mode (G.652.D/G.657.A1)

The Corning logo is a blue square with the word "CORNING" in white, serif, uppercase letters.

## Optical Characteristics

Fiber Name	SMF-28® Ultra fiber
Fiber Type	Single-mode
Performance Option Code	22
Maximum Attenuation	0.34 dB/km / 0.34 dB/km / 0.22 dB/km
Typical Attenuation	0.32 / 0.32 / 0.18
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	G.652.D/G.657.A1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2020 Corning Optical Communications. All rights reserved.