

# FuseLite® Connector, MTP® compatible, 3.0 mm Round Cable Non-pinned, 50 µm multimode (OM2/3/4)

CORNING


## Part Number: SOC-MTP-3N-OM4

The FuseLite™ MTP® Compatible Splice-On Connector enables fast, reliable fusion splicing repair, restoration or connectivity for data center cabling systems, or other applications where MTP (also known as MPO) connectivity is required.

As part of EDGE™ and EDGE8™ solutions for data centers, the FuseLite™ MTP® compatible connector pairs with EDGE modules and hardware for high-density data center connectivity without pre-engineered trunk lengths – ideal for applications where final trunk length decisions must be made on-site. The FuseLite MTP connector is also ideal for emergency repair and restoration of data center cable trunks and other MTP connector-based connectivity.

Available in single-mode and multimode, the FuseLite™ Connector eliminates the need for splice trays and is compatible with leading fusion splicers in the market.

For more information about EDGE™ and EDGE8™ solutions for the data center, including the EDGE SE solutions featuring the FuseLite™ MTP® compatible connector, visit [www.corning.com/opcomm](http://www.corning.com/opcomm) contact Corning Customer Care at 1-800-743-2675.

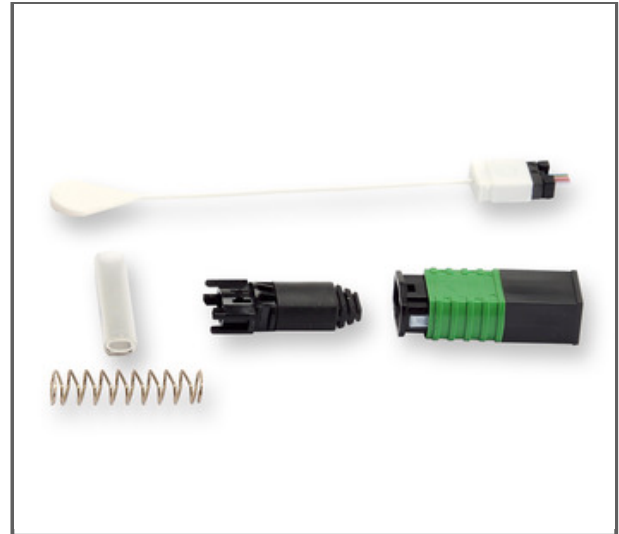

## Features and Benefits

**Broad operating temperature range (-40°C to +75°C)**

Utility and flexibility

---

**Factory-polished end face**

Consistent optical performance

---

**Fusion splice connectivity**

Ideal for reflectance-sensitive applications

---

**Splice protection within connector body**

No splice trays required

---

**Available in ribbon and 3 mm cable options**

Ideal for cable trunk restoration and repair

# FuseLite® Connector, MTP® compatible, 3.0 mm Round Cable Non-pinned, 50 µm multimode (OM2/3/4)

CORNING

## Specifications

### Design - Connector

Connector Type	MTP® (non-pinned)
Housing Color	Aqua
Housing Material	Composite
Boot Color	Black
Ferrule Material	Composite

### General Specifications

Fiber Category	50 µm MM (OM2/OM3/OM4)
Product Type	Field-Installable Connectors
Compatibility	MTP® Compatible
Corning Logo	Yes
Keyed (security)	No
Technology	Fuse-On

### Optical Specifications - Connector

Polish	PC
Insertion Loss, Max.	0.3 dB

### Ordering Information

Units per Delivery	1/1
Packaging	Individual Pack

**FuseLite® Connector, MTP® compatible, 3.0 mm Round Cable Non-pinned, 50 µm multimode (OM2/3/4)**



Environmental Conditions

Temperature Range, Operation	-40 °C - 75 °C (-40 °F - 167 °F)
------------------------------	----------------------------------

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	IEC 61754-7 compliant



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2020 Corning Optical Communications. All rights reserved.