


ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

Corning ALTOS® cable with FastAccess® technology is an all-dielectric gel-free cable designed for outdoor and limited indoor use for campus backbones in lashed aerial and duct installations. The innovative FastAccess technology feature combined with the all-dielectric gel-free loose tube design simplifies removal of the cable jacket reducing cable end access time by at least 50 percent. Equally important is the overall reduction in risk of inadvertent fiber damage and risk to installers from sharp cable access tools. The cable is fully waterblocked using craft-friendly, water-swappable materials, which means no clean up is required. The flexible buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing easy mid-span access. The all-dielectric gel-free cable construction requires no bonding or grounding, and these cables have a medium-density polyethylene jacket that is rugged, durable and easy to handle. A variety of fiber types are available including 62.5 μm and 50 μm , single-mode and hybrid versions, as well as fibers with Gigabit and 10 Gigabit Ethernet performance.

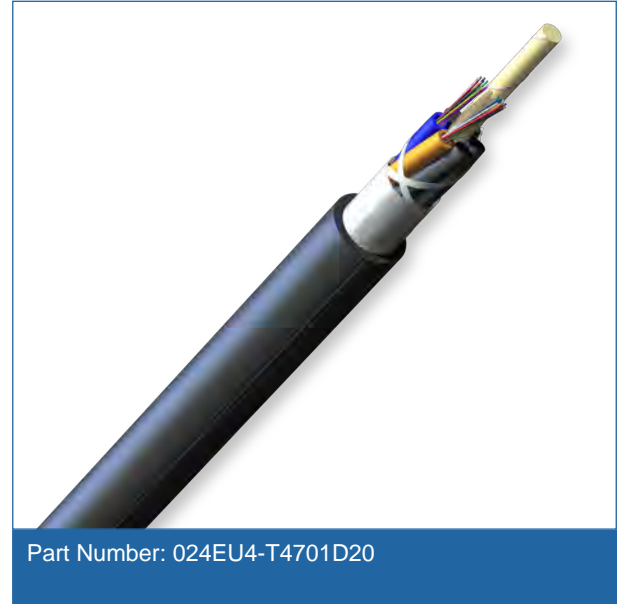

Features and Benefits

Contains FastAccess® technology

Innovative cable jacket feature reduces cable end access time by at least 50 percent and reduces overall risk of inadvertent fiber damage as well as risk to installers from sharp cable access tools

Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

Fully waterblocked loose tube all-dielectric gel-free design


Simple access and no clean up

Industry-standard performance

Meets the requirements of Telcordia GR-20, Issue 3 and ICEA S-87-640

Available in 62.5 μm , 50 μm , single-mode and hybrid versions

Ready for any application including Gigabit Ethernet and 10 Gigabit Ethernet

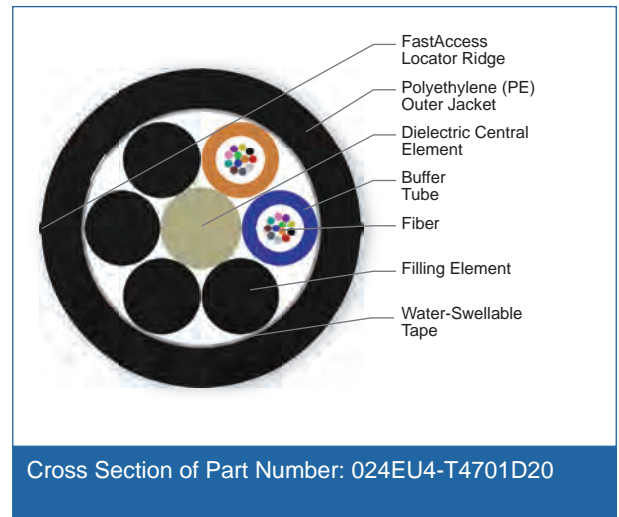

ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

Standards

Common Installations Outdoor lashed aerial and duct; indoor when installed according to National Electrical Code® (NEC®) Article 770

Design and Test Criteria ANSI/ICEA S-87-640

Specifications

General Specifications

| | |
|----------------|-------------------|
| Environment | Outdoor |
| Application | Aerial, Duct |
| Cable Type | Loose Tube |
| Product Type | Dielectric |
| Fiber Category | Single-mode (OS2) |

Temperature Range

| | |
|--------------|------------------------------------|
| Storage | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation | -30 °C to 70 °C (-22 °F to 158 °F) |
| Operation | -40 °C to 70 °C (-40 °F to 158 °F) |

Cable Design

| | |
|----------------------------|--|
| Central Element | Dielectric |
| Fiber Count | 24 |
| Fiber Coloring | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Fibers per Tube | 12 |
| Number of Tube Positions | 6 |
| Number of Active Tubes | 2 |
| Buffer Tube Color Coding | Blue, Orange |
| Buffer Tube Diameter | 2.5 mm (0.1 in) |
| Number of Filling Elements | 4 |
| Tape | Water-swellaable |
| Number of Ripcords | 1 |

CORNING

ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

Cable Design

| | |
|-----------------------|-------------------|
| Outer Jacket Material | Polyethylene (PE) |
| Outer Jacket Color | Black |

Mechanical Characteristics Cable

| | |
|-----------------------------------|--------------------------|
| Max. Tensile Strength, Short-Term | 2700 N (600 lbf) |
| Max. Tensile Strength, Long-Term | 890 N (200 lbf) |
| Weight | 73 kg/km (49 lb/1000 ft) |
| Nominal Outer Diameter | 10.5 mm (0.41 in) |
| Min. Bend Radius Installation | 158 mm (6.2 in) |
| Min. Bend Radius Operation | 105 mm (4.1 in) |

Chemical Characteristics

| | |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2002/95/EG |
|------|---|

Fiber Specifications

Optical Characteristics (cabled)

| | |
|-------------------------|--------------------------------------|
| Fiber Name | SMF-28e+® fiber |
| Fiber Category | G.652.D |
| Fiber Code | E |
| Performance Option Code | 01 |
| Wavelengths | 1310 nm / 1383 nm / 1550 nm |
| Maximum Attenuation | 0.4 dB/km / 0.4 dB/km / 0.3 dB/km |
| Typical attenuation | 0.33 dB/km / 0.33 dB/km / 0.19 dB/km |

* Typical attenuation values match the attenuation values listed in the optical fiber specifications. See www.corning.com/opticalfiber for Corning optical fiber specifications. Better attenuation performance options are available for some fiber and cable types. Contact Customer Care for additional fiber options.

* * SMF-28® Ultra and ClearCurve® XB fiber deliver up to 10x better macrobend loss performance compared to the G.652.D standard and up to 33 percent better macrobend loss performance than the G.657.A1 standard for 10mm radii bends.

CORNING

ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

Ordering Information

| | |
|---------------------|--|
| Part Number | 024EU4-T4701D20 |
| Product Description | ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology, 24 F, Single-mode (OS2) |



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. Corning Optical Communications is ISO 9001 certified. © 2014 Corning Optical Communications. All rights reserved.

CORNING